



# BOSCH

# PROFESSIONAL POWER TOOLS CATALOGUE Q1.2024

Scan e-Catalogue







# BOSCH




PARTS & LABOR INCLUDED

**ON ALL POWER TOOLS  
AND MEASURING TOOLS**

## REGISTER YOUR TOOLS FOR E-WARRANTY

- 1 DOWNLOAD**  
The BeConnected App
- 2 REGISTER**  
Your Tools
- 3 UPLOAD**  
Proof of Purchase

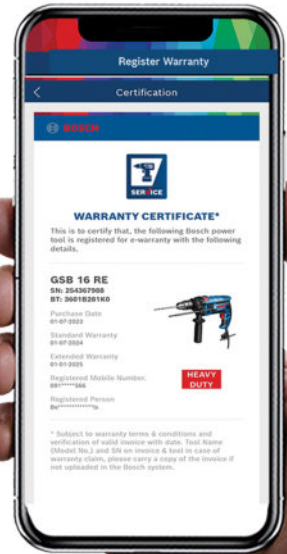

# NATIONAL SERVICE WEEK 2024



**FREE PICK-UP & DELIVERY • FREE REPAIR • 20% OFF ON SPARE PARTS**

## BOSCH AUTHORIZED SERVICE CENTERS

**METRO MANILA:** ALTSTAR ENTERPRISES 1054 Reina Regente cor Recto Ave., Binondo Manila 1006 T: +63 917 8305576 E: howelltansy@gmail.com | **TOOL CLINIC CORPORATION** 20-A D. Tuazon corner Luskot St. Don Manuel, Quezon City 1113 T: +63 2 72553932 M: +63 9270784408 / +63 9171736636 E: toolcliniccorp@gmail.com | **TOOL CARE MASTER PHILS. INC.** G/F WC Bldg., 2438 Belarmino St., Brgy. Bangkal, Makati City 1233 T: +63 2 77387406 / 8401934 M: +63 9171032451 E: toolcaremaster@gmail.com

**SOUTH LUZON:** MALIBANGA ENTERPRISES 346-C Alabang Zapote Road, Talon Uno Las Pinas City 1700 T: +63 2 88336214 E: malibanga\_ent@yahoo.com | **CHARLESTON COMPUTER EXPRESS CENTER** 476 Rizal Avenue corner P. Genato St. Brgy 21, Batangas City 4200 T: +63 43 9802169 E: charlestonpcworx@gmail.com | **OLIVAN HARDWARE DEPOT INC.** Behind Oliván Sea Oil Station, Magsaysay Avenue, Naga City 4400 T: +63 54 472 2828 E: olivanhomedepotsales@gmail.com | **DARAGA DY ENTERPRISES INC.** Rizal St. Daraga Albay 4501 T: +63 52 483 3613 / 483 3813 E: jen\_sy\_dy@yahoo.com

**NORTH WEST LUZON:** DAU-AGRI IND'L CORP. Dau Access Road Nlex, Highway, Dau Mabalacat City, Pampanga 2010 T: +63 45 458 2941 E: dauagri@gmail.com | **D.L. ELECTRONICS SERVICE CENTER** Coastway Complex, Arellano Bani Dagupan City 2400 M: +63 9457304673 E: dlbugaio@yahoo.com | **D.L. ELECTRONICS SERVICE CENTER** #65 Decidar Bldg. Lower Bonifacio St. Baguio, Benguet 2600 T: +63 746619438 E: boschbaguiohub@gmail.com

**NORTH EAST LUZON:** JDL AIR CONDITIONING & REF. SPECIALIST CORP. Brgy Zulueta, Maharlika Highway Cabanatuan City, Nueva Ecija 3100 T: +63 44806184 E: jdl.aircondition@gmail.com | **GOMEZ POWER TOOLS SALES & SERVICE CENTER** Rizal, Santiago City, Isabela, Region 2, Cagayan Valley 3311 T: +63 7883955266 E: gomezpowertools@gmail.com | **CONSUMER APPLIANCE SERVICE CENTER** National Highway, Purok 2, Bonfal proper Bayombong, Nueva Vizcaya 3700 T: +63 78 8051880 M: +63 9175644800 E: conserv\_2006@yahoo.com

**VISAYAS:** **TOOLAID SERVICE CENTER** Unit 2 & 3 Maroo Arcade Mantawi Drive William Seno St. Mandaue City 6014 T: +63 9428336437 / +63 9693153888 E: support-mde@toolaid.ph | **TOOLAID SERVICE CENTER** Unit D, Arcenas Bldg., MJ Cuenco Ave. Brgy T. Padilla, Cebu City 6000 T: +63 324273375 M: +63 9428121885 / +63 9693163888 E: support-cbu@toolaid.ph | **BACOLOD INTEGRAL INC.** JL Bldg Luzuriaga St. Brgy 31, Bacolod City 6100 T: +63 344338170 / 4766561 / 434 2303 E: bacolodintegral@yahoo.com | **NIPPON ENGINEERING WORKS** Ledesma corner Mabini St. Ilo Ilo City 5000 T: +63 333373232 / 5081869 / 3371122 E: nipponengineeringworks@gmail.com | **FAR EASTERN HARDWARE & FURNITURE** 38 Quezon St. Ilo Ilo City 5000 T: +63333373808 E: feh\_qzn@yahoo.com / sales@fareastern.com.ph | **REJOICE HARDWARE & ELECT'L SUPPLY** 166 Hermie Bldg Cervantes St. Dumaguete City 6200 T: +63 354226762 / 2254685 / 2251836 E: rejoice\_hardware@yahoo.com | **WASHINGTON ENTERPRISES** 181-185 Rizal Ave., Tacloban City 6500 T: +63 533212521 E: wephl@yahoo.com / washington.enterprises.service@gmail.com

**SOUTH MINDANAO:** **DMD Electronics** JVS Peak Bldg., Door 2 & 3 Roxas Blvd., Davao City 8000 T: +63 822843114 E: dmd\_electronics@yahoo.com

**NORTH MINDANAO:** **AC POWERTOOLS TRADING** #583 Jr. Borja Extension Camaman-an, Cagayan De Oro City 9000 M: +63 9664196636 E: acpowertools2023@gmail.com | **HI-12 APPLIANCE MARKETING & SERVICE** Mariano Badelles, Sr. St. Brgy Saray, Iligan City 9200 T: +63 632215639 / 2238536 E: hitwelve2017@yahoo.com | **N&N SERVICE CENTER** Sunriser Lane 1 Talon Talon Loop Tugbungan, Pagadian City 7016 M: +63 629932190 / 9916578 / 926 1665 E: nnservice.center.c@gmail.com

**ROBERT BOSCH INC.** 11/F West Campus, 20 Le Grand Ave., Mckinley West, Fort Bonifacio, 1634 Taguig City T: +63 2 88703888 | www.bosch-pt.com.ph

**BOSCH CEBU HUB,** Unit 2 & 3 Maroo Arcade, Mantawi Drive, William Seno St., Cebu City 6014 T: +63 32 4147909 | E: toolaidservicecentermde@yahoo.com

**BOSCH DAVAO HUB,** Door 2 & 3 JV'S Peak Bldg., Roxas Blvd., Davao City 8000 T: +63 82 2843114 | E: dmd\_electronics@yahoo.com





# THE ONE STOP SOLUTION FOR YOUR BOSCH POWER TOOLS

## What is BeConnected App?

**BeConnected** is your free, convenient and efficient digital app for numerous services from Bosch Professional Power Tools. Register once, and continuously benefit from all current and future services. Read on to discover how to enjoy a better digital lifestyle with Bosch BeConnected and download the app today!

## BeConnected App Features



Product Authenticity Check




E - Warranty Registration



Earn points and redeem gifts



Latest promotions & hot deals

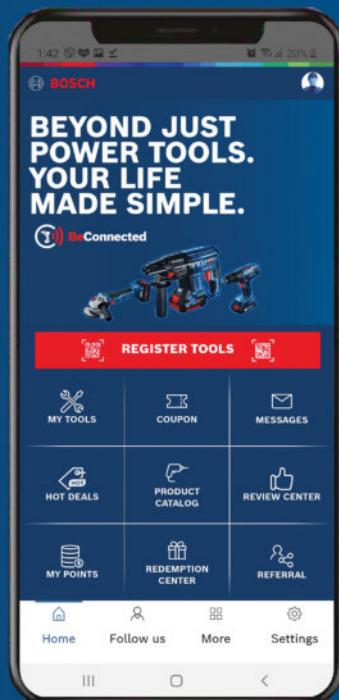

Discount coupons



Dealer and Service Center Locator



Product Catalogue & Reviews




Invite Bosch users by sharing a link to download

## How to download BeConnected?

Scan this QR:



OR

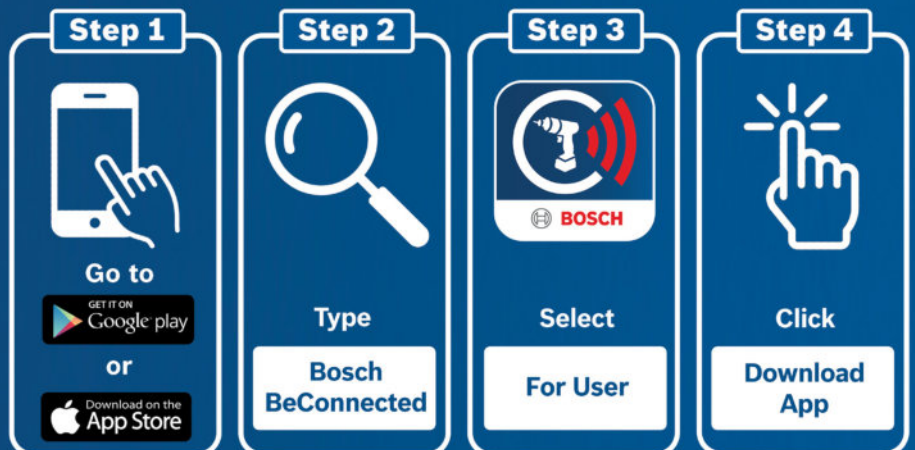

**Register now to get your rewards!**

## FIND US ONLINE!

Follow our social media accounts to keep up with the latest news about Bosch Power Tools. Don't hesitate to contact us via these channels if you need any help or support.

**Bosch Professional Power Tools  
and Accessories**



**Bosch Professional  
Philippines**



**www.bosch-pt.com.ph**



**Info.BoschPT@ph.bosch.com**




## e-NEWSLETTER

Subscribe to our e-newsletter and be the first to receive exclusive offers and promotions.

**Register now at:**

**<https://www.bosch-pt.com.ph/ph/en/specials/news/newsletter-registration/>**

**SCAN HERE**



## DEALER LOCATOR

Find the Bosch authorized dealer near you.

**SCAN HERE**



## SHOP ONLINE

Bosch Power Tools are available online at our Flagship store and authorized online dealers.



**Lazada**



**Shopee**





# BOSCH

# GET 18 MONTHS WARRANTY

on **HEAVY DUTY TOOLS**

JANUARY 1 - DECEMBER 31, 2024

**1** **DOWNLOAD**  
BeConnected APP



**BeConnected**




DOWNLOAD NOW!



**2** **REGISTER**  
YOUR TOOLS **HEAVY DUTY**

**3** **UPLOAD PROOF**  
OF PURCHASE

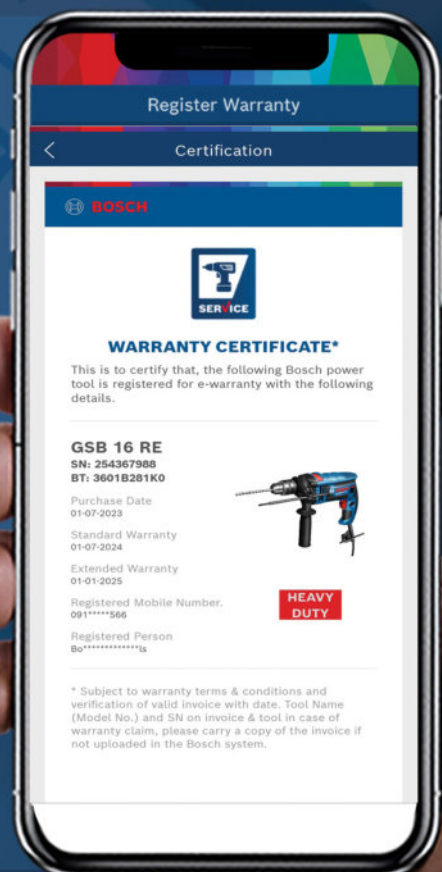

Terms and conditions apply.



# GBH 187-LI Professional

Live the freedom that your work demands.

**NEW**

## WHY THIS

- 1 Efficiency Champion**  
More efficiency of work by brushless motor and optimizing mechanism for drilling many holes on just one charge
- 2 One Chuck**  
A single chuck that can fit both SDS-plus and cylindrical / hex shank drill bits for wide range of applications
- 3 Work-life Secured**  
Better production by KickBack Control, Vibration Control and compatible with dust extractor solution
- 4 Connectivity & HMI**  
Simplify tough work by HMI and smart APP for customize setting

- One Chuck <sup>USP</sup>**  
A single chuck that can fit both SDS-plus and cylindrical / hex drill bits for your wide range of applications
- Efficiency Champion <sup>USP</sup>**  
More holes per battery charge
- Constant Speed**  
Motor speed and tool output power remain constant while battery charge is being consumed
- Connectivity & HMI <sup>USP</sup>**  
Enables connection with tools for easy access, customization, maintenance, and device management
- KickBack Control <sup>USP</sup>**  
Intelligent sensor to stop the tool in the event of accidental tool kick back
- Vibration Control**  
Design to absorb and evenly distribute vibration to much lower level
- L-Shape Design**  
Better weight balance with vertical positioning of motor
- Dust Free Drilling**  
Compatible with existing dust solutions

## TARGET USERS

- Electrician
- Plumber
- HVAC
- Concrete Core Construction



GBH 187-LI One Chuck	Unit	Specifications
Impact energy	J	2.4
Voltage	V	18
No-load Speed	rpm	0 - 980
Impact rate	bpm	0 - 4,350
Max. drilling Ø concrete	mm	24
Max. drilling Ø steel	mm	13
Max. drilling Ø wood	mm	30
Bare Tool weight	kg	2.9
Working LED	-	Yes
Recommended battery	-	GBA 4.0/5.0/6.0 Ah ProCORE 8.0/12.0 A

# GBH 185-LI Professional

Power packed, fully in your control!

**NEW**

## WHY THIS

- 1 Constant Speed**  
More holes drilled per battery charge and stable power output, due to its powerful 18V brushless motor with constant speed
- 2 Safety In Control**  
Enhanced safety against accidental jams and reduced vibration exposure due to KickBack Control and Vibration Control
- 3 Dust In Control**  
Dust-free work condition by working along with GDE 12 extractor

- Constant Speed <sup>SP</sup>**  
More holes per battery charge and continuous power output, due to Bosch 18V brushless motor with constant speed
- Vibration Control <sup>SP</sup>**  
Minimized vibration effects with the help of Vibration Control
- Trigger in Drilling Axis <sup>SP</sup>**  
Easy handling via ergonomic compact design with trigger and drilling axis alignment
- Dust Free Drilling <sup>USP</sup>**  
Compatible with Auto Power GDE 12 dust extraction attachment, for dust-free drilling experience
- KickBack Control <sup>USP</sup>**  
Injury prevention through kickback control, which automatically halts tool operation

## TARGET USERS

- Electrician
- Cabinet Installer & Carpenter
- HVAC



GDE 12 Cordless Dust Extractor (1600A02BW0)	
<b>Capacity</b>	
Voltage	: 18 V
Working Modes	: Hammer drill only
Dust Collection Material	: Concrete only
Compatible with	: GBH 185-LI
Drilling Diameter	: 4 - 12 mm
Maximum Drilling Depth	: 100 mm
Max. Drill bit Length	: 165 mm
Weight	: 1.1 kg

GBH 185-LI	Unit	Specifications
Voltage	V	18
Working modes	-	Drill / Hammer drill / Chisel
Impact energy	J	1.9
No-load speed	rpm	0 - 1,050
Impact rate	bpm	0 - 4,675
Drilling Ø in concrete	mm	4-22
Max. drilling Ø in steel	mm	13
Max. drilling Ø in wood	mm	20
Bare tool weight with aux. handle	kg	2.3
Working LED	-	Yes
Recommended battery	-	GBA 18V ≥4.0 Ah



# GDS 18V-1600 HC Professional

Exceptional cordless power: 3/4" high-torque impact wrench with BITURBO Brushless technology

**NEW**

**HEAVY DUTY**

**Q1 2024**

## WHY THIS

01

### BITURBO Brushless technology

Maximized power with cordless freedom thanks BITURBO Brushless technology and ProCORE18V batteries

02

### Heavy Duty performance

Exceptionally powerful impact wrench with a 1,600 Nm tightening and 2,200 Nm breakaway torque

03

### Adjustable screw modes

Auto Bolt Release (ABR) mode ensures comfortable handling by avoiding the loss or drop-down of metal bolts or nuts

## APPLICATIONS



## TARGET USERS

Civil Engineering

Industrial Metal Fabrication

Electricity supply

Repair and service of motor vehicles

Mining and Oil extraction

### Heavy Duty Performance <sup>SP</sup>

- Extreme Power for tough applications: up to 1,600 Nm tightening torque and 2,200 Nm breakaway torque
- Engineered for toughest applications in Heavy Industry, Petro-Chemical Industry, Truck and Construction machineries maintenance and the Service industry



### Controlled Power

- Three speed settings provide excellent control over speed / torque for high versatility
- Tool condition status indicator
- LED light



### Anvil Type

3/4" Friction ring plus thru hole



**USP**

### BITURBO Brushless

High performance brushless motor maximizes the full potential of the ProCORE18V batteries

**USP**

### Adjustable Screw Modes

- Two default modes: A and B
- Further modes are available via Bosch Toolbox App. Each mode can be individualized and adapted to the users' specific applications



GDS 18V-1600 HC Professional	Unit	Specifications
Voltage	V	18
No-load speed	rpm	0-800 / 1,300 / 1,750
Impact rate	bpm	0-1,550 / 2,200 / 2,350
Anvil size	—	3/4"
Max. tightening/breakaway torque	Nm	1,600 / 2,200
Speed / Power settings	—	3
Weight w/o battery	kg	3.2



# Bosch GO (GEN 3) Professional

Versatile, Precise, Convenient

**NEW**

Q1  
2024

## WHY THIS

01

**Universal bit locker**  
Holds any bit firmly.


02

**Ring LED**  
Illumination and battery status indicator.

03

**Next generation mechanical clutch**  
Finest power adjustment at your fingertips.

## APPLICATIONS

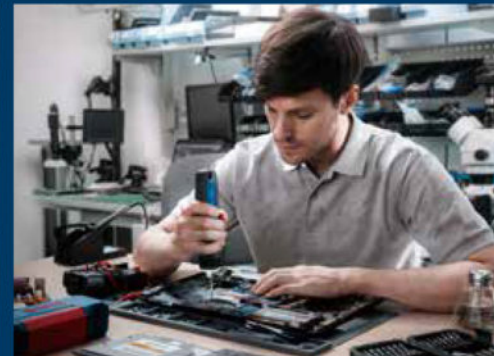

## TARGET USERS

Decorator | Electrician | Home appliance repair | Furniture installer | Bike installer

### New industrial design

Improved ergonomic and professional look



### Smart stop

Tool cuts off immediately after high vibration clutching or misalignment (setting 5-7 + max. mode only)

### Ring LED <sup>SP</sup>

Able to work in the dark, battery status indicator



### Universal bit locker <sup>SP</sup>

Holds any bit firmly

### Next generation mechanical clutch <sup>SP</sup>

Extra precision with 7 torque settings and maximum performance mode



### 2.0 Ah battery capacity

Increased number of applications per charge

### USB-C charging

Convenient charge by trendy USB type-C



### Optimized press button

Improved haptic feedback to prevent accident activation



### Electronic brake

Easy to control as the tool stops immediately after deactivation



## Bosch GO (GEN 3) Professional

	Unit	Specifications
Voltage	V	3.6
Battery	Ah	2.0
Torque (min / soft / hard)	Nm	0.1 / 2.5 / 5
Speed	rpm	360
Activation mode	—	Push start & Press button
Mechanical clutch settings	—	7 + Maximum performance mode
Bit locker	—	Mechanical & Universal
Charging port	—	USB-C
Work LED	—	Ring LED & Battery status



# GSH 14 C Professional

Defeat Downtime With A Breakthrough Hammer!

**HEAVY DUTY**

## WHY THIS

01

### Long Lifetime & Low Maintenance

Brushless motor for sparks-free operation and no carbon brush replacement, Bosch patented Auto-Gear-Rotation technology extends gear lifetime

02

### Connectivity Simplifies Tough Work

HMI and connectivity are convenient for users to understand the tool usage and plan preventive maintenance

03

### Champion in Breaking Performance

28 J of impact force and 1,900 bpm impact speed enable great breaking performance

## APPLICATIONS



## TARGET USERS

Demolition Contractor

Concrete Restoration

### Strong Breaking Performance

Champion in breaking performance with 28 J of impact force and 1,900 bpm impact speed

28 J  
1900 bpm

### USP Connectivity Simplifies Tough Work

HMI and connectivity make it easier to understand the tool usage and plan preventive maintenance to avoid unexpected downtime



### USP Long Motor Lifetime

AC Brushless motor for a longer lifetime through spark-free operation



### Health and Safety Most Important

Less user fatigue from vibration due to vibration control with dampened main and auxiliary handle



### USP Long Gear Lifetime

Auto-Gear-Rotation technology for an extended gear runtime



### Hex 22 mm Tool Holder

Robust tool holder with quick release chuck, easy chisel exchange



GSH 14 C Professional	Unit	Specifications
Rated input power	W	1,750
Impact energy (EPTA)	J	28
Impact rated at rated speed	bpm	1,900
Weight	kg	14.6
Width x length x height	mm	140 x 750 x 280
Tool holder	mm	Hex 22
Vibration emission value	m/s <sup>2</sup>	10.9
Uncertainty K	—	1.5



# GAC 250 Professional

The hassle-free cutting experience you deserve.



## WHY THIS

- 01 Effortless**  
Comfortable to use all day long thanks to its light weight, compact size, and ergonomic design
- 02 Fast & Powerful**  
Outstanding cutting speed in blocks of varying sizes with its powerful motor
- 03 Durable**  
Extremely tough and durable saw blade guaranteed by Bosch's unique Tungsten Carbide Technology

**Maximum comfort all day long**  
Ergonomic handle designed for comfortable all-day operation

**Effortless AAC cutting <sup>USP</sup>**  
Balanced tool weight distribution and downward facing guide bar to make AAC block cutting effortless

**Fast cutting speed <sup>USP</sup>**  
Powerful 1,200 W motor and optimized chain speed for faster cutting

**Extra care on users' health**  
Possibility to connect dust extraction adapter\*

**Safety first**  
Lock-off button, emergency front brake and auxiliary handle to ensure safe operation

**Excellent portability <sup>SP</sup>**  
Smaller than an AAC block\*\*, lighter than 5kg, the tool made to cut anywhere

**Durable accessories <sup>SP</sup>**  
Tungsten-carbide-tipped saw chain made to last in heavy dust application

## APPLICATIONS



Masonry & Restoration



General Contractors

GAC 250 Professional	Unit	Specifications
Input power	W	1,200
No-load chain speed	m/s	max. 12
Chain bar length	mm	335
Max. cutting capacity	mm	250
Tool weight (incl. accessories)	kg	4.7
Bare tool size (L*W*H) (incl. auxiliary handle)	mm	310 x 210 x 210
Dust extraction interface	—	Yes

# GCM 254 D Professional

Long-lasting Accuracy in Every Cut.



## WHY THIS

- 01 Superior Precision**  
Guided, precise cutting with optimized mechanic design & highly visible laser cutting line
- 02 Ease of Use**  
Better support for various material cutting provided by detachable box extension\* and top / front fence clamping
- 03 Accuracy in Every Cut**  
Easier multiple repeating cuts thanks to length gauge

**Bevel Detent**  
Detent for angles 45°, 33° and 22.5°

**Top and Front Fence Clamping**  
Clamp that can be switched from top to front, able to clamp workpiece through 2 directions

**Box Extension\***  
Easy-to-use sawing with more stability through removable box extension

**Laser <sup>SP</sup>**  
Precise cutting with highly visible laser line


**Length Gauge <sup>USP</sup>**  
Multiple repeat cuts are now easier with the practical length gauge

**Large Cutting Capacity**  
Larger cuts with superior precision with 310 mm sliding cutting capacity

**Quick Front Bevel Adjustment**  
By operating with this mechanism, bevel angles can be easily changed

\*The number of box extension differs from different version due to regional needs

## APPLICATIONS



GCM 254 D Professional	Unit	Specifications
Type	—	Sliding dual bevel
Power	W	1,800
No-load speed	rpm	4,800
Width x length x height	mm	574 x 779 x 645
Max. cutting capacity (depth / width)	mm	90 / 310
Miter angle	°	47 / 52
Bevel angle	°	45 / 45
Laser	—	Red Laser
Weight	kg	19.5



# GWS 700 Professional

Comfort with performance - an ideal grinder for your daily work

## WHY THIS

- 01 High Performance**  
Powerful motor with outstanding capacity
- 02 Long Lifetime**  
Reliable structure design and qualified components to ensure the tool fulfill Bosch quality requirement
- 03 Ease of Use**  
Light weight and compact housing design

**High removal rate** **USP**  
Powerful motor with outstanding overload capability

**Better motor cooling for uninterrupted longer work**  
With double air inlets for additional air flow

**Long gear lifetime**  
Thanks to the robust metal flange

**Reliable performance & lifetime** **SP**  
Simple yet reliable design

**Comfortable handling and easy control** **USP**  
Compact & slim grip  
Ergonomic palm-fit round design

## APPLICATIONS



Metal Installation & Locksmith



Civil Engineering

GWS 700 Professional	Unit	Specifications
Voltage	V	220 – 240
Power	W	710
No-load speed	rpm	12,000
Disc diameter	mm	100
Grip size	mm	185
Spindle size	—	M10
Weight	kg	1.6

# GST 750 Professional

Power up to excellent cutting!

## WHY THIS

- 01 Faster and more precise cutting experience with powerful 520W motor**
- 02 Precise cuts and fine finishing with 4-stage orbital actions**
- 03 Adjustable speed for different materials with the pre-selection speed wheel**
- 04 Easy cutting in solid wood, metal, and other materials with this powerful corded jigsaw**

**Optimized for cutting diverse materials**  
Optimized adjustable cutting performance in multiple materials with pre-selection speed wheel

**Fatigue free for long work time** **SP**  
Superior holding experience with ergonomic handle design using soft rubber for longer work hours with less effort

**More powerful and speed** **SP**  
A cutting experience with more speed and precision, thanks to the powerful 520 W motor

**Better dust extraction result** **SP**  
Easy work with a vacuum cleaner with the integrated dust extraction port (no adapter required)

**High performance in speed and precision** **SP**  
Faster and/or more precise cuts with the help of 4-stage orbital actions

**Full control while cutting**  
Full control while cutting and compatible with guide rail secured by robust baseplate, and protecting expensive workpieces from scratches with plastic cover shoe

**Faster and easier blade change** **SP**  
Faster and easier blade change with SDS blade holder

**Secured cutting quality**  
Secured cutting quality with removable front dust cover and anti-splinter guard for protecting material surface

## APPLICATIONS



GST 750 Professional	Unit	Specifications
Voltage	V	220 – 240 V; 50 – 60 Hz
Power	W	520
Stroke rate	spm	800 – 3,200
Stroke length	mm	20
Cutting depth	mm	75
Bevel angle	°	-45 ~ +45
Weight	kg	2.2



# Contractor's Choice Range QUALITY MADE AFFORDABLE.

## Small Angle Grinder

### GWS 700



**NEW**

#### Specifications

Voltage	220-240
Power	710 W
No-load speed	12,000 rpm
Disc diameter	100 mm
Grip size	195mm
Spindle Size	M10
Weight	1.6kg

## Cordless Drill Driver

### GSR 120-LI (KIT SET)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30 / 14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling	
-In Wood	20 mm
-In Metal	10 mm
Weight excl. battery	0.8 kg

## Cordless Impact Drill

### GSB 120-LI (KIT SET)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30/14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling	
-In Wood	20 mm
-In Metal	10 mm
-In Masonry	8 mm
Weight excl. battery	0.9 kg

## Cordless Impact Driver

### GDR 120-LI (KIT SET)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Max. Torque	100 Nm
No-load Speed	0-1,300/ 2,600 rpm
Impact rate	0 - 3,200 bpm
Screw dia	M4 - M12
Tool holder	1/4" Hex Uni
Weight excl. battery	1.1 kg

## Drill

### GBM 400



**NEW**

#### Specifications

No-load speed	0 - 2,800 rpm
Rated input power	400 W
Weight	1.283 kg
Power output	180 W
Chuck capacity, min./max.	10 mm

## Impact Drill

### GSB 550



#### Specifications

Power Input	550 W
In Masonry	13 mm
In Wood	25 mm
In Steel	10 mm
Chuck Capacity	1.5 / 13 mm
No-load speed	0 - 2,800 rpm
Impact rate	0 - 44,800 bpm
Weight	1.8 kg

## Rotary Hammer

### GBH 220



#### Specifications

Impact Energy	2 J
Power	720 W
No-load speed	0 - 2,000 rpm
Max. drilling concrete	22 mm
Mode	3 modes
Weight	2.3 kg

## Demolition Hammer

### GSH 500



#### Specifications

Power Input	1,100 W
Impact Energy - EPTA Value	7.8J
Impact Rate	2,900 bpm
Tool holder	Hex
Auxiliary Handle	Straight Handle
Weight	5.6 kg

## Demolition Hammer

### GSH 500 MAX



#### Specifications

Power Input	1,100 W
Impact Energy - EPTA Value	7.8J
Impact Rate	2,900
Tool holder	SDS-Max w/ Vario lock
Auxiliary Handle	Straight Handle
Weight	5.7 kg

## Marble Cutter

### GDC 140



#### Specifications

Power Input	1,400 W
No-load Speed	13,200 rpm
Disc Diameter	115mm
Max. Cutting Depth	35 mm
Weight	2.9 kg

## Cut-off Saw

### GCO 220



#### Specifications

Power Input	2,200 W
No-load Speed	3,800 rpm
Disc Diameter	355 mm
Cutting Capacity	
Square Bar	119 x 119 mm
Round Bar	129 mm
Soft Start	No
Weight	14 kg

## Circular Saw

### GKS 130



**NEW**

#### Specifications

Rated input power	1300 W
Saw blade diameter	184 mm
No-load speed	6,380 rpm
Saw blade bore diameter	20 mm
Weight	3.9 kg
Baseplate	290 x 150 mm
Guide rail compatible	no

## Circular Saw

### GKS 140



#### Specifications

Rated input power	1400 W
Saw blade diameter	184 mm
No-load speed	6,200 rpm
Saw blade bore diameter	20 mm
Weight	3.7 kg
Baseplate	290 x 150 mm
Guide rail compatible	no

## Table Saw

### GTS 254



#### Specifications

Rated input power	1,800 W
Saw blade diameter	254 mm
Incline setting	45° L / 0° R
Table size	555 x 555 mm
No-load speed	4,300 rpm
Saw blade bore diameter	30 mm
Weight	24.4 kg

## Jigsaw

### GST 750



**NEW**

#### Specifications

Stroke rate at no load	800 -3,200 spm
Rated input power	520 W
Saw. stroke length	20 mm
Weight	2.29 kg

## Planer

### GHO 6500



#### Specifications

Rated input power	650 W
Planing width	82 mm
Planing depth	0 mm
Weight	2.8 kg
Adjustable rebating depth	0 - 9 mm
No-load speed	16,500 rpm

## Sander

### GSS 140



#### Specifications

Rated input power	220 W
Weight	1.2 kg
No-load speed	14,000 rpm
No-load orbital stroke rate	28,000 opm
Oscillating circuit diameter	1.5 mm

## Plunge Router

### GOF 130



#### Specifications

Rated input power	1300 W
No-load speed	11,000 - 28,000 rpm
Bit holder	6 - 8.0 mm
Router bit diameter	40 mm
Maximum router cage stroke	55 mm
Weight	3.5 kg

## Trimmer

### GKF 550



#### Specifications

Power input	550 W
No-load speed	33,000 rpm
Bit size	6 mm / 1/4"
Weight	1.4 kg

## Blower

### GBL 620



#### Specifications

Rated input power	620 W
Weight	1.7 kg
Volumetric flow rate	3.5 m³/min
No-load speed	16,000 rpm







# PROFESSIONAL 18V SYSTEM

## Drill Driver

### GSR 185-LI (Kit Set)



Specifications	
Head Length	162 mm
No-load speed	0 – 500 / 0 – 1,900 rpm
Max. Torque (soft/hard)	50 / 21 Nm
Max. Screw Diameter	10 mm
Max. Drilling Dia.:	
-In Wood	35mm
-In Metal	10 mm
Chuck material	Metal
Weight	1.3 kg

### GSR 18V-50 (Kit Set)



Specifications	
Battery capacity	18 V / 2.0 Ah
Torque	28/50/50 Nm
Chuck type	Metal
No load speed	0 – 460 / 0 – 1,800 rpm
Max. Drilling dia.:	
-In Steel	13 mm
-In Wood	35 mm
Max. Screw	10 mm

### GSR 18V-90 C (Solo)



Specifications	
Battery voltage	18 V
Max. Torque (hard/soft)	36 / 64 Nm
No-load speed	0 – 630 / 0 – 2,100 rpm
Chuck type	Metal, 13 mm
Max. Drilling dia.:	
-In Steel	13 mm
-In Wood	68 mm
Max. Screw	12 mm

## Impact Drill

### GSB 185-LI (Kit Set)



Specifications	
Head Length	177 mm
No-load Speed	0-500 / 1,900 rpm
Max. Torque (hard/soft)	50 / 21 Nm
Max. Screw Diameter	10mm
Max. Drilling Dia.:	
-In Wood	25 mm
-In Metal	10 mm
-In Masonry	10 mm
Chuck type	Metal
Weight	1.3 kg

### GSB 18V-50 (Kit Set)



Specifications	
Battery Voltage	18 V / 2.0 Ah
Max. Torque (hard/soft)	50 / 28 Nm
Chuck Type	Metal
No-load speed	0-460 / 0-1,800 rpm
Max. Drilling Dia.:	
-In Steel	13 mm
-In Wood	35 mm
-In Masonry	13 mm
Max. Screw	10 mm

## Impact Drill

### GSB 18V-90 C (Solo)



Specifications	
Battery voltage	18 V
Torque	36 / 64 Nm
No-load speed	0 – 630 / 0 – 2,100 rpm
Chuck type	Metal, 13 mm
Max. Drilling Dia.:	
In Wood	68 mm
In Steel	13 mm
In Masonry	13 mm
Max. Screw	12 mm

## Impact Driver

### GDR 180-LI (Kit Set)



Specifications	
Battery Voltage	18 V / 2.0 Ah
Max. Torque	160 Nm
No-load Speed	0-2,800 rpm
Impact Rate	0-3,600
BIT Holder / Shank	1/4" Hex
Head Length	150 mm

## Impact Driver Wrench

### GDX 180-LI (Kit Set)



Specifications	
Battery Voltage	18 V / 2.0 Ah
No-load Speed	0 - 2,800 rpm
Impact Rate	0 - 3,600 bpm
Max Torque	180 Nm
Head Length	170 mm
BIT Holder/Shank	1/4 Hex; 1/2" Square
LED light	Yes - above trigger

### GDX 18V-200 (Solo)



Specifications	
Battery Voltage	18 V
Max. torque	200 Nm
No-load speed	0 – 3,400 rpm
Impact rate	0 – 4,200 rpm
Tool holder	1/4" Hex; 1/2" square
Screw dia.	M10 – M20

## Impact Wrench

### GDS 250-LI (Kit Set)



Specifications	
Battery	18 V / 4.0 Ah
Charger	AL 18 40 CV
No-load Speed	0 - 2,400 rpm
Impact Rate	0 - 3,300 bpm
Tool Holder	1/2" Square
	(Pin Hole+ Retention Ring)
Screw Size	M10 - M18

## Impact Wrench

### GDS 18V-400 (Solo)



Specifications	
Battery Voltage	18 V
Max. torque	400 Nm
No-load speed	0 – 2,500 rpm
Impact rate	0 – 3,700 rpm
Breakaway torque	600 Nm
Tool holder	1/2" square
Screw dia.	M10 – M20

## Rotary Hammer (SDS Plus)

### GBH 185-LI (Kit Set/Solo)



Specifications	
Battery Voltage	18 V
Modes	Drill/Hammer Drill/Chisel
Impact energy	1.9 J
Impact rate	0 – 4,675 bpm
No-load speed	0 – 1,050 rpm
Drilling in concrete	4-22 mm
Tool holder	SDS plus

### GBH 187-LI (One chuck) (Kit Set/Solo)



Specifications	
Battery Voltage	18 V
Modes	Drill/Hammer Drill/Chisel
Impact energy	2.4 J
Impact rate	0 – 4,350 bpm
No-load speed	0 - 980 rpm
Max. drilling in concrete	4 - 24 mm
In steel/ In Wood	13 mm/ 30 mm
Tool holder	SDS Plus/ Cylindrical Hex

### GBH 18V-28 CF (Solo)



Specifications	
Battery Voltage	18 V
Modes	Drill/Hammer Drill/Chisel
Impact energy	3.3 J
Impact rate	0 – 4,220 bpm
No-load speed	0 - 950 rpm
Max. drilling in concrete	28 mm
Tool holder	SDS Plus w/ Quick Change Chuck

## Angle Grinder

### GWS 180-LI (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	11,000 rpm
Disc dia.	100 mm
Spindle size	M10
Weight	1.4 kg (tool only)

## Angle Grinder

### GWS 18V-10 (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	9,000 rpm
Disc dia.	100 mm
Spindle size	M10
Weight excl. battery	2.1 kg

### GWS 18V-10 P (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	9,000 rpm
Disc dia.	100 mm
Spindle size	M10
Weight excl. battery	2.1 kg
Paddle Switch	

### GWX 180-LI (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	11,000 rpm
Disc dia.	120 mm
Tool holder	X-LOCK
Weight excl. battery	1.6 kg

## Straight Grinder

### GGS 18V-LI (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	2 - 22,000 rpm
Tool holder	Collet up to 8 mm
Weight incl. battery	1.8 kg

## Rivet Gun

### GRG 18V-16 C (Solo)



Specifications	
Battery Voltage	18 V
Motor	Brushless
Pulling Force	16,000 N
Stroke length	25 mm
Rivet Diameter	3.0 - 6.4 mm
Weight excl. battery	1.6 kg

## Metal Circular Saw

### GKM 18V-50 (Solo)



Specifications	
Saw blade bore	136 / 20 mm
No-load speed	4,250 rpm
Cutting depth 90°	50 mm
Weight excl. battery	2.2 kg

## Circular Saw

### GKS 185-LI (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	5,000 rpm
Cutting depth 0°/45°	57/41 mm
Saw blade bore	165 / 20 mm
Bevel capacity Max.	50°
LED Work area illumination	Yes

### GKS 18V-57 G (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	3,400 rpm
Saw blade bore	165 / 20 mm
Max. Cut in wood	(90°) 57 mm
	(45°) 42 mm
Guide rail	FSN Compatible

## Jigsaw

### GST 185-LI (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	5,000 rpm
Saw blade bore	165 / 20 mm
Cutting depth 0°/45°	57 / 41 mm
Bevel Capacity Max.	50°
LED Work area illuminaton	Yes
Weight excl. battery	2.8 kg

## Reciprocating Saw

### GSA 185-LI (Solo)



Specifications	
Battery Voltage	18 V
No-load speed	0 - 2,900 min <sup>-1</sup>
Stroke length	28 mm
Weight excl. battery	3.2 kg
Cutting depth	
-In wood	230 mm
-Metal profile & pipes	150 mm

Kit Set: Batteries and charger included - Solo: Batteries and charger not included.



## Reciprocating Saw

### GSA 18V-32 (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
Stroke length	32 mm
Stroke rate	0 - 2,500 spm
Cutting depth:	
In Wood	230 mm
Metal	175 mm

## Multi-Cutter

### GOP 185-LI (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
Motor Type	Brushless
No Load Speed	10,000-20,000 rpm
Oscillating Angle (degree)	3.4
Starlock Type	Starlock Plus
Quick Change	SDS Snap in
Vibration Plunge Cut Wood:	3.4 m/s2
Weight w/o Battery	1.2 kg

## Planer

### GHO 185-LI (Solo)



HEAVY DUTY **NEW**

#### Specifications

Battery Voltage	18 V
Planing Width Max	82 mm
Planing Depth	0 - 2.6 mm
No Load Speed	14,000 rpm
Rebating Depth	0 - 9 mm

## Random Orbit Sander

### GEX 185-LI (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
Motor Type	EC
No-load speed	6,000 - 10,000 rpm/min
Sanding Sheet Diameter	125 mm
Sanding Stroke	2.5 mm
Vibration	2.2 m/s2
Weight (bare tool)	0.93 kg

### GEX 18V-125 (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
No-load speed	6,000 - 10,000 rpm
Orbital stroke rate	12,000 - 20,000 opm
Eccentricity	1.25 mm
Sanding sheet	Hook-and-loop
Orbit dia.	2.5 mm
Weight	1.1 kg (Tool only)

## Orbital Sander

### GSS 18V-LI (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
No-load Orb. Stroke	11,000-22,000 opm
Oscillating Circuit Diameter:	1.6 mm
Sanding Surface	114 cm2

## Heat Gun

### GHG 18V-50 (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	: 18 V
Heat up Time	: <6 sec (up to 300 c)
Temperature Lvl	: 2 (300/600 c)
Max Airflow (In l/min)	: 175
Accessories	: Reduction Noozle, Refelction Noozle

## Blower

### GBL 18V-120 (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	: 18 V
No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I : 9 min/Ah
	: Speed II: 5 min/Ah
Weight without Cable:	1.1 kg

## Vacuum

### GAS 18V-1 (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
Container vol.	0.7 L
Filter surface area	55 cm²
Max. Airflow rate	10 l/s
Max. Vacuum pressure	60 mbar
Runtime	7 min / Ah

### GAS 18V-10LPremium (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	: 18 V
Max. Vacuum	: 90 mbar
Max. Airflow	: 24 l/sec
Max. runtime with	
6.0 Ah Battery	: 24 min
Dust Class (EU Stnadard):	L-class
Container Vol. Gross/net:	10/6 litre/gallons
Weight	: 4.6 kg

## Radio

### GPB 18V-2 (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
Input Voltage	240 V
Radio Freq.	87.5 - 08 MHz
Amplifier power	15 W
Interface FM, Aux & Bluetooth	

## LED Jobsite Light

### GLI VariLED (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
Luminous Flux	420 Lumen
Max. operating time	135 mins/Ah
Weight	0.3 kg

### GLI 18V-1900 (Solo)



HEAVY DUTY

#### Specifications

Battery Voltage	18 V
Max. Brightness	1,900 Lumen
Runtime	100 min / Ah
Brightness level	2

## Battery Pack

### GBA 18V 2.0 Ah



Li-Ion

#### Specifications

Battery Voltage	18 V
Battery Capacity	2.0 Ah
Weight	350 g

### GBA 18V 4.0 Ah



Li-Ion

#### Specifications

Battery Voltage	18 V
Battery Capacity	4.0 Ah
Weight	610 g

## Battery Pack

### ProCORE18V 4.0 Ah



Li-Ion

#### Specifications

Battery Voltage	18 V
Battery Capacity	4.0 Ah
Weight	515 g

### ProCORE18V 8.0 Ah



Li-Ion

#### Specifications

Battery Voltage	18 V
Battery Capacity	8.0 Ah
Weight	955 g

### ProCORE18V 12.0 Ah



Li-Ion

#### Specifications

Battery Voltage	18 V
Battery Capacity	12.0 Ah
Weight	1,350 g

## Starter Kit

### Starter Kit ProCORE18V 4.0 Ah



Li-Ion

#### Specifications

Battery Voltage	18 V
Battery Capacity	4.0 Ah
Charger Current	8 A

### Starter Kit 18V 2.0 Ah



Li-Ion

#### Specifications

Battery Voltage	18 V
Battery Capacity	2.0 Ah
Charger Current	4 A

## Bluetooth Module

### GCY 42



#### Specifications

Bluetooth Module for tools with connectivity	
--	--

## Chargers

### GAL 1880 CV



#### Specifications

Charging voltage	14.4 - 18V
Charge current	8A
Weight	700 g

### GAL 18V-160 C



#### Specifications

Charging voltage	14.4 - 18V
Charging Current	16 A
Weight	950 g
Mode Power Boost	Bluetooth

### GAL 18V6-80



#### Specifications

Charging Voltage	14.4 - 18V
Charging Current	8 A
Charging bay	6 slots
Weight	1,800 g



PROFESSIONAL  
**18V**  
SYSTEM

**MIX & MATCH!**  
Combine as you need

1. Choose your solo tool



+ 2.

Choose your batteries and charger





# BOSCH

## BOSCH BATTERIES - SUPERIOR TECHNOLOGY

Discover the advantages of ProCORE18V - our leading battery technology



### POWER

- up to **864W** of power

### CELLS

- 18650 standard cells
- no memory effect
- no self-discharge

### HEATMANAGEMENT

- **COOLPACK 1.0** improves heat dissipation from the inside to the outside of the battery fo battery lifetime and runtime

### ProCORE18V

- up to **2,000W<sup>1</sup>** equivalent corded power with ProCORE18V **8.0Ah** and **12.0Ah**, optimally suited for BITURBO tools.
- up to 864W with ProCORE18V 4.0Ah, but more compact and lightweight than a standard battery

- 21700 high-performance cells
- no memory effect
- no self-discharge
- lower inner-cell resistance and less power loss
- higher currents for a longer time for more demanding applications



- **COOLPACK 2.0 technology** more than doubles the lifetime of standard batteries without COOLPACK
- special HDPE (High-Density Polyethylene) material with large outside surface area for improved heat dissipation
- no air gaps between the cells: every cell is fully covered with HDPE material for optimal heat dissipation
- Copper cell connectors for lower resistance, less power loss, and highly efficient heat release



### THE PROOF IS OUT - ACHIEVE MORE WITH THE PROCORE18V 8.0AH



# +30%

faster material removal.<sup>2</sup>



# +70%

more holes.<sup>3</sup>



# +151%

more holes.<sup>4</sup>

### COMPATIBLE SINCE 2008:

All of our batteries are compatible with new and existing Bosch Professional tools in the same voltage class

<sup>1</sup> Depending on the tool

<sup>2</sup> ProCore 18V 8.0Ah vs. GBA 18V 6.0Ah.  
Application: Two-minute metal edge grinding with GWS 18V-125 SC, ceramic grit wheel (2 608 601 502)

<sup>3</sup> ProCore18V 8.0Ah vs. GBA 18V 6.0Ah

Application: Drilling holes in a 10x10 cm piece of soft wood using a 32 mm spade bit.

<sup>4</sup> ProCore 18V 8.0Ah.

Application: Drilling a hole 25 mm in diameter using the SDS-plus; C30/37 concrete.





# BITURBO

## BRUSHLESS



Unleash up to 2,000W of equivalent corded power with ProCORE18V battery and BITURBO tools

Neodymium  
High-  
performance  
motor



+



Our most  
powerful  
battery ever

UP TO 2,000 WATTS  
OF CORDED POWER



**BITURBO**  
BRUSHLESS

### BITURBO BRUSHLESS TOOLS

- High-performance brushless motors: Using the world's strongest commercially available magnets, the motor exploits the full potential of ProCORE18V batteries for up to 2,000W of equivalent corded power
- Comfort first: Outstanding power-to-weight ratio and ergonomic design make the extreme power of BITURBO tools lighter and easier to handle
- High user-protection: Equipped with intelligent features to lower the risk of common injuries and put you in ultimate control: e.g. KickBack Control, Drop Control, Vibration Control

Pro**CORE**18V

For maximum power of BITURBO tools, use ProCORE18V 8.0Ah or 12.0Ah batteries.



<https://www.bosch-pt.com.ph/ph/en/biturbo>

It's in your hands. Bosch Professional.



# BITURBO BRUSHLESS

## Impact Drill Driver

### GSD 18V-150 C (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
Torque settings	84/100/150 Nm
No-load speed	0 – 550 / 2,000 rpm
Chuck size	1.5 / 13 mm, Metal
Max. Impact rate	30,000 bpm
Max. Drilling	
-In Wood	150 mm
-In Steel	16 mm
-In Concrete	20 mm

## Impact Wrench

### GDS 18V-1000 (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
Torque level	350/700/1,000 Nm
No-load speed	0 – 1,750 rpm
Anvil Type	1/2" Square
Max. Impact rate	2,600 bpm
Screw diameter	M14 – M24
Breakaway torque	1,600 Nm

### GDS 18V-1050 H (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
Torque level	350/750/1,050 Nm
No-load speed	0 – 1,750 rpm
Anvil Type	3/4" Square
Max. Impact rate	2,600 bpm
Screw diameter	M14 – M24
Breakaway torque	1,700 Nm

### GDS 18V-1600 HC (Solo)



Q1 2024

HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
Anvil Type	3/4" Square
Max. tightening torque	1,600 Nm
Max. breakaway torque	2,200 Nm
Speed level	3 speed settings
No-load speed	0-800/1300/1750 rpm
Impact rate	0-1550/2200/2350 bpm
Screw diameter	M16 – M33
Adjustable Screw Modes	

## Circular Saw

### GKS 18V-68 GC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
No-load speed	2,500 - 5,000 rpm
Disc dia.	190 mm
Max. Cutting	(90°) 68 mm (45°) 50 mm
Weight	4.3 kg (tool only)
Eco-mode, Speed setting	
Guiderrail compatible	

## Plunge Saw

### GKT 18V-52 GC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
No-load speed	2,800 - 5,500 rpm
Disc dia.	140 mm
Max. Cutting	(90°) 52 mm (45°) 32 mm
Bevel angle	-1 – 47 °
Weight	4.1 kg (tool only)
Eco-mode, Speed setting	
Guiderrail compatible	

## Rotary Hammer (SDS Max)

### GBH 18V-36 C (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
Max. Impact energy	7 J
Impact rate	0 – 2,900 bpm
Rated speed	0 – 500 rpm
Tool holder	SDS Max
Drilling dia.	14 – 35 mm
Weight	5.1 kg (tool only)
Anti-Kickback & Vibration	

### GBH 18V-45 C (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
Max. Impact energy	12.5 J
Impact rate	0 – 2,760 bpm
Rated speed	0 – 305 rpm
Tool holder	SDS Max
Drilling dia.	12 – 45 mm
Weight	8 kg (tool only)
Anti-Kickback & Vibration	

## Sliding Mitre Saw

### GCM 18V-216 D (Solo)



HEAVY DUTY BITURBO NEW BRUSHLESS

#### Specifications

Battery Voltage	18V
No-load speed	5,000 rpm
Disc dia. / Bore Size	216 / 25.4 mm
Mitre setting	48 ° L / 48 ° R
Bevel setting	47 ° L / 47 ° R
Cutting cap.	(0°) 66 x 305 mm (45° mitre) 66 x 215 mm (45° bevel) 42 x 305 mm
Weight	16.2 kg (tool only)

### GCM 18V-254 D (Solo)



HEAVY DUTY BITURBO NEW BRUSHLESS

#### Specifications

Battery Voltage	18V
No-load speed	4,500 rpm
Disc dia.	254 mm
Mitre setting	47 ° L / 47 ° R
Bevel setting	45 ° L / 0 ° R
Cutting cap.	(0°) 90 x 305 mm (45° mitre) 90 x 215 mm (45° bevel) 55 x 305 mm
Weight	18 kg (tool only)

## Glide Mitre Saw

### GCM 18V-305 GDC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
No-load speed	2,550 - 4,000 rpm
Disc dia.	305 mm
Mitre setting	52 ° L / 60 ° R
Bevel setting	47 ° L / 47 ° R
Cutting cap.	(0°) 104 x 341 mm (45° mitre) 104 x 240 mm (45° bevel) 40 x 341 mm
Weight	26.9 kg (tool only)

## Table Saw

### GTS 18V-216 (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
No-load speed	4,500 rpm
Disc dia.	216 mm
Table size	658 x 553 mm
Cutting height	70 mm
Max. Cutting (R)	635 mm
Weight	21.6 kg (tool only)
Soft Start, Restart Protection	

## Angle Grinder

### GWS 18V-15 SC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

#### Specifications

Battery Voltage	18V
No-load speed	3,400 - 11,000 rpm
Disc dia.	100 mm, M10
Equal to corded	1,500 W
Weight	2.1 kg (tool only)
Speed Selector, Drop Control	
Kickback Control, Restart Prot.	



To experience the maximum power of BITURBO tools, use **ProCORE18V 8.0 Ah or 12.0 Ah** batteries.

Don't worry, both BITURBO and ProCORE18V are part of our Professional 18V System, which means they are fully compatible with all our new and existing Bosch Professional 18V products – since 2008.







# BOSCH

# BITURBO BRUSHLESS

## EXPERIENCE A NEW WAY OF WORKING WITH BITURBO TOOLS AND APP

Connect BITURBO Tools with App for Maximum Efficiency & Customization




Compatible with iOS and Android



GCY 42 installed on tool for tool to connect to APP



Bosch Toolbox APP




Connected tools can be found in My Tools within Bosch Toolbox APP

## World's First Levelling Function



GSR/B 18V-150 C

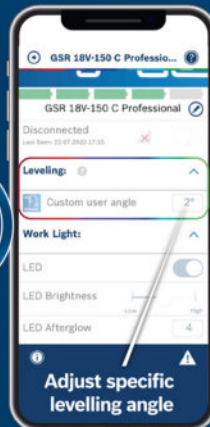


Adjust specific levelling angle




## Personalized Speed Levels




GCM 18V-305 GDC



Default Setting



Personalized Setting





# PROFESSIONAL GARDEN 18V SYSTEM

## Grass Trimmer

### GRT 18V-33 (Solo)



Q1  
2024

#### Specifications

Battery Voltage	18V
Cutting Diameter line (cm)	33
Line diameter (mm)	2.4
Main handle type	D-shape
No-load Speed (rpm)	4500-6400
Weight excl. battery (kg)	3.5

## Brush Cutter

### GFR 18V-23 (Solo)



Q1  
2024

#### Specifications

Battery Voltage	18V
Cutting Diameter line (cm)	33
Cutting Diameter Blade (cm)	23
Line diameter (mm)	2.4
Main handle type	D-shape
Blade thickness (mm)	2
Diameter bore hole (mm)	25.4
No-load Speed (rpm)	4500-6400
Weight excl. battery (kg)	3.6

## Hedge Cutter

### GHE 18V-60 (Solo)



Q1  
2024

#### Specifications

Battery Voltage	18V
Blade length (cm)	600
Cutting speed (rpm)	1500
Tooth opening (mm)	23
No-load stroke rate (spm)	3,000
Weight excl. battery (kg)	3

## Blower

### GBL 18V-750 (Solo)



Q1  
2024

#### Specifications

Battery Voltage	18V
Max. Air Speed (km/h)	198
Max. Air flow (m <sup>2</sup> /h)	780
Weight excl. Battery (kg)	2.8







# BOSCH

## CHOOSE 18V BATTERY FOR THE MOST EFFICIENT POWER OUTPUT!

### Interchangeable battery system since 2008

Compact		Performance				Endurance	
2.0 Ah	4.0 Ah	4.0 Ah	5.0 Ah	6.0 Ah	8.0 Ah	12.0 Ah	
<b>Biturbo Tools</b> <b>BITURBO</b>							
Drill/Driver & Impact Drill (GSR/GSB)		Impact Driver/Wrench (GDS/GDX/GDR)		Rotary Hammer (GBH <2.0 J)		Rotary Hammer (GBH 2.0-4.0 J)	
Sabre Saw (GSA <25mm stroke lengths)		Sabre Saw (GSA >25mm stroke lengths)		Circular Saw (GKS/GKM/GKT)		Vacuum (GAS >1L) & Heat Gun (GHG)	
Straight Grinder (GGS) & Rivet Gun (GRG)		Orbital Sander (GSS) & Random Orbit Sander (GEX)		Planer (GHO)		Multi Cutter (GOP) & Shear (GSC)	
Vacuum (GAS <1L) & Blower (GBL)		Worklight (GLI) & Radio (GML & GPB)		Jigsaw (GST) & Band Saw (GCB)		Angle Grinder (GWS)	
Table Saw (GTS)		Rotary Hammer (GBH >4.0 J)		Mitre Saw (GCM)			



# PROFESSIONAL 12V SYSTEM

## Drill Driver

### GSR 120-LI (Kit Set)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30 / 14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling Dia.:	
-In Wood	20 mm
-In Metal	10 mm
-In Masonry	8 mm
Weight excl. battery	0.9 kg

### GSR 12V-15 FC (Kit Set)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Drilling Dia.:	
-In Steel	10 mm
-In Wood	19 mm
Max. Torque (hard/soft)	30 / 15 Nm
No-load Speed	0 - 400 / 1,300 rpm
Chuck Capacity	10 mm
Weight excl. battery	0.6 kg

### GSR 12V-30 (Kit Set)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Drilling Dia.:	
-In Steel	8 mm
-In Wood	20 mm
Max. Torque (hard/soft)	30 / 17 Nm
No-load Speed	0 - 420 / 1,600 rpm
Weight	0.82 kg

## Impact Drill

### GSB 120-LI (Kit Set)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30 / 14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling Dia.:	
-In Wood	20 mm
-In Metal	10 mm
-In Masonry	8 mm
Weight excl. battery	0.9 kg

### GSB 12V-30 (Kit Set)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Drilling Dia.:	
-In Steel	10 mm
-In Wood	20 mm
-In Masonry	8 mm
Max. Torque (hard/soft)	30 / 17 Nm
No-load Speed	0 - 420 / 1,600 rpm
Weight	0.82kg

## Impact Driver

### GDR 120-LI (Kit Set)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Max. Torque Hard	100 Nm
No-load speed	0 - 1,300 / 2,600 rpm
Impact rate	2,800 - 3,200 bpm
Max. Screw Dia.	8 mm
Bit Holder	1/4"
Weight	1.05 kg

### GDR 12V-110 (Solo)



#### Specifications

Battery Voltage	12 V
Tool Holder	1/4" HEX Uni
No-load speed	0 - 1,200 / 2,600 rpm
Impact rate	0 - 2,700 / 3,100 bpm
Torque settings	2
Max. Torque	110 Nm
Weight excl. battery	1.5 kg

## Circular Saw

### GKS 12V-LI (Solo)



#### Specifications

Battery Voltage	12 V
No-load Speed	1,400 rpm
Depth of Cut - 90°	26.5 mm
Bore Diameter	15 mm
Max. Bevel	45°
Weight	1.4 kg

## Jigsaw

### GST 12V-LI (Solo)



#### Specifications

Battery Voltage	12 V
No-load Stroke Rate	1,500 - 2,800 spm
Stroke length	18 mm
Cutting Capacity	
-In Wood	70 mm
-In Aluminum/non alloy	3 mm
Weight	1.5 kg

## Sabre Saw

### GSA 12V-LI (Solo)



#### Specifications

Battery Voltage	12 V
Stroke speed	0 - 3,000 spm
Stroke Length	14.5 mm
Pipe Diameter	50 mm
Wood	65 mm

## Multi-Cutter

### GOP 12V-28 (Solo)



#### Specifications

Battery Voltage	12 V
Oscillation Angle	
on Left / Right	1.4°
No-Load Speed	5,000 - 20,000 rpm
Weight	0.81 kg

## Angle Grinder

### GWS 12V-76 (Solo)



#### Specifications

Battery Voltage	12 V
No-load speed	19,500 rpm
Weight excl. battery	0.5 kg
Grinding Spindle Thread	M5
Bore Size, Diameter	10 mm
Grinding/Cutting disc, Dia	76 mm
Weight	0.9 kg

## Rotary Tool

### GRO 12V-35 (Solo)



#### Specifications

Battery Voltage	12 V
Max. Collet Diameter	3.2 mm
No-load Speed	5,000 / 32,000 rpm
Weight	0.62 kg

## Random Orbit Sander

### GEX 12V-125 (Solo)



#### Specifications

Battery Voltage	12 V
Pad diameter	125 mm
No-load speed	6,000 - 10,000 rpm
Orbit	2.5 mm
Weight excl. battery	0.95 kg

## Planer

### GHO 12V-20 (Solo)



#### Specifications

Battery Voltage	12 V
Planing width, max	56 mm
Planing depth	0 - 2 mm
Rebating depth	0 - 17 mm
No-load speed	14,500 rpm
Weight excl. battery	1.5 kg

## Palm Router

### GKF 12V-8 (Solo)



#### Specifications

Battery Voltage	12 V
Collet dia.	6 mm / 8 mm 1/4"
(RAP) mm	
No-load rotation	13,000 min-1
Weight	1.1kg

## Vacuum

### GAS 12 V-LI (Solo)



#### Specifications

Battery Voltage	12 V
Container Volume	0.35 l
Filter Surface	408 cm²
Max. Volume Flow Rate	15l/Sec
Max. Volume Pressure	45 mbar
Weight	0.9 kg

## LED Torch

### GLI 12V-80 (Solo)



#### Specifications

Battery Voltage	12 V
Weight excl. battery	0.14 kg
Luminous flux	80 lumen
Max. operating time	590 min / Ah

### GLI 120 (Solo)



#### Specifications

Battery Voltage	12 V
Weight excl.t battery	0.15 kg
Luminous flux	300 lumen
Max. operating time	180 min / Ah

### GLI 12V-330 (Solo)



#### Specifications

Battery Voltage	12 V
Runtime	6 h
Brightness	330 lumen
Max. operating time	180 min / Ah
Weight	0.3 kg

## Pruner

### Pro Pruner (Kit Set)



#### Specifications

Battery Voltage	12 V / 2.0 Ah
Battery Capacity	2.0 Ah
Max. cutting diameter	25 mm
Weight w/ 2.0Ah battery	1 kg
No. of cuts ( using 2.0 Ah)	3,000

## Batteries and Chargers

### GBA 12V 2.0Ah



#### Specifications

Battery Voltage	12 V
Battery Capacity	2.0 Ah
Weight	180 g

### GBA 12V 4.0Ah



#### Specifications

Battery Voltage	12 V
Battery Capacity	4.0 Ah
Weight	370 g

### GBA 12V 6.0Ah



#### Specifications

Battery Voltage	12 V
Battery Capacity	6.0 Ah
Weight	370 g

### Starter Kit 12V 2.0 Ah



#### Specifications

Battery Voltage	12 V
Battery Capacity	2.0 Ah
Battery charging voltage	12 V
Charge current	4 A

### GAL 12V-40



#### Specifications

Battery charging voltage	10.8 - 12 V
Charge current	4 A
Weight	450 g

BoschGO

MINIMUM EFFORT, MAXIMUM EFFICIENCY



## 3.6 V Screw Driver

### Bosch Go Gen 2



#### Specifications

Battery Voltage	3.6 V
Battery	1.5 Ah
Torque (Hard/soft joint)	5/2.5 Nm
Speed	360 Rpm
Electronic brake	Yes
Smart stop	Yes
Tool holder	1/4" Inter HEX

### Bosch Go Gen 3



#### Specifications

Battery Voltage	3.6 V
Battery	2.0 Ah
Torque (Min/soft/Hard joint)	0.1/2.5/5 Nm
Speed	360 Rpm
Mechanical clutch settings	7+ modes
Bit locker	Mechanical & Universal
Work LED	Ring LED & Battery status

Kit Set: Batteries and charger included - Solo: Batteries and charger not included.



# MOBILITY SYSTEM

**INLAYS**

1/2 inlays

1/1 inlays

**FOAM INLAYS**  
102 mm  
136 mm

**TRANSPORTATION**

L-BOXX Roller

Aluminum Caddy

**BASIC ELEMENTS**

L-BOXX  
102 mm  
136 mm  
238 mm  
374 mm

i-BOXX shelf 3 pcs  
(3x shelf + lid)

L-CASE  
(stackable on L-Boxx, but not connectable)

L-BOXX 306

LT-BOXX  
170 mm  
272 mm

Full Flexibility

**SMALL ITEMS STORAGE**

Inset boxes for L-BOXX 102  
12 pcs set  
13 pcs set

LS-TRAY  
72 mm  
92 mm\*  
(\*only for L-BOXX 306)

i-BOXX  
53 mm  
72 mm

i-BOXX w/ inset  
53 mm  
72 mm

L-BOXX Mini

# BOSCH FSN GUIDE RAIL SYSTEM

## GUIDERAILS

Works with circular saw ending GCE or G



## CARRY BAG

## ADAPTERS

## FUNCTIONAL PIECE



**FSN BAG**  
Fits up to two FSN 1600



**FSN OFA**  
For Routers



**FSN SA**  
For GST Cordless Jigsaw




**FSN WAN**  
Miter Segment



**FSN VEL**  
Connecting piece

## RUBBER PARTS

## ADDITIONAL SUPPORT



**FSN HB**  
Anti-slip strip



**FSN SS**  
w/ Splinter Protection



**FSN KK**  
End cap covers



**FSN KZW**  
Fast fix clamps



**FSN RS**  
Kickback stop



# JUST ONE CLICK

**XLOCK.** The ultimate changing system for grinders.



## YOUR ADVANTAGES AT A GLANCE

### CONVENIENT

Just one click. Easy change of grinder accessories without any losable parts or additional mounting equipment - up to 5 times faster compared to conventional changing solutions

### RELIABLE

Directional accessories like diamond discs can't be incorrectly mounted, thanks to the innovative **XLOCK** System. This leads to better working results.

### HOW IT WORKS



Press until click



Release disc

## XLOCK Grinders:

### GWX 14-125



Power output 1,400 W  
No-load speed 11,000 rpm  
Disc Diameter 125 mm  
Weight 2.3 kg

### GWX 180-LI



Battery Voltage 18V  
No-load speed 11,000 rpm  
Disc Diameter 125mm  
Weight bare 1.6kg

### GWX 18V-10 SC



Battery Voltage 18V  
No-load speed 4,500 - 9,000 rpm  
Disc Diameter 125mm  
Weight (bare) 2.0kg  
Variable Speed

## XLOCK Accessories:



METAL						INOX / STAINLESS STEEL	TILE / CERAMIC / CONCRETE / MASONRY	WOOD / WOOD WITH NAIL / ALUMINUM / ACRYLIC / PLASTIC	
Cutting 125 x 1,6 x 22,23mm	Grinding 125 x 16 x 22,23mm	Flap discs 0.125mm/ G40 / X571	Flap discs 0.125mm/ G60	Flap discs 0.125mm/ G80 / X571	Flap discs 0.125mm/ G120 / X571	Inox Cutting 125 x 1 x 22,23mm	Ceramic 125 x 1 x 22 23 x 1, 6 x 7mm	Universal 125 x 22 23 x 2.0 x 10mm	Carbide Multi Wheel 125mm



## Drywall Screwdriver

### GTB 650



#### Specifications

Rated Input Power	650 W
No-load speed	0 - 5,000 rpm
Rated speed	0 - 5,200 rpm
Torque, max.	12 Nm
Bit Holder	1/4" internal hex
Self-drilling screw dia.	6 mm
Screw dia.	4 mm
Weight	1.4 kg

## Auto-feed Attachment

### GMA 55



#### Specifications

Max. screw diameter	5 mm
Screw head diameter, max.	9.5 mm
Screw length	25 - 55 mm
Weight	0.36 kg
Compatibility	All Bosch Professional corded and cordless drywall screwdrivers

## Drill

### GBM 6 RE



HEAVY DUTY

#### Specifications

Rated Input Power	350 W
No-load Speed	0 - 4,000 rpm
Power Output	136 W
Rated Speed	3,116 rpm
Rated Torque	12.3 Nm
Weight	1.2 kg

### GBM 400



HEAVY DUTY

#### Specifications

No-load speed	0- 2,800 rpm
Rated input power	400 W
Weight	1.283 kg
Power output	180 W
Chuck capacity, min./max.	10 mm

### GBM 10 RE



HEAVY DUTY

#### Specifications

Power Input	450 W
In Steel	10 mm
In Aluminium	10 mm
In Wood	25 mm
No-load Speed	0 - 2,600 rpm
Weight	1.3 kg

## Drill

### GBM 13 RE



HEAVY DUTY

#### Specifications

Power Input	600 W
In Steel	13 mm
In Aluminium	13 mm
In Wood	30 mm
No-load Speed	0 - 2,600 rpm
Weight	1.65 kg

### GBM 1600 RE



HEAVY DUTY

#### Specifications

Rated Input Power	850 W
No-load Speed	0 - 630 rpm
Max Torque	11.0 Nm
Chuck Capacity	1-16 mm
Weight	3 kg

## Impact Drill

### GSB 10 RE



HEAVY DUTY

#### Specifications

Power Input	500 W
In Masonry	10 mm
In Steel	8 mm
In Wood	20 mm
No-load Speed	0 - 2,600 rpm
Weight	1.5 kg

### GSB 550



HEAVY DUTY

#### Specifications

Power Input	550 W
No-load Speed	0 - 2,800 rpm
Impact rate	0 - 41,800 bpm
Drilling in concrete	10 mm
Drilling Steel/Wood	20 mm
Chuck capacity	10 mm
Weight	1.2 kg

### GSB 13 RE Wrap



HEAVY DUTY

#### Specifications

Power Input	650 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,150 rpm
Impact rate at no-load speed	0-47,000 bpm
In concrete	13 mm
In steel	10 mm
In wood	20 mm
Weight	2 kg

## Impact Drill

### GSB 13 RE Hand Tools



HEAVY DUTY

#### Specifications

Power Input	650 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,150 rpm
Impact rate at no-load speed	0-47,000 bpm
In concrete	13 mm
In steel	10 mm
In wood	20 mm
Weight	2 kg

### GSB 16 RE Carton



HEAVY DUTY

#### Specifications

Power Input	750 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,250 rpm
Impact rate at no-load speed	0 - 48,500 bpm
In concrete	16 mm
In steel	12 mm
In wood	25 mm
Weight	1.8 kg

### GSB 16 RE Wrap



HEAVY DUTY

#### Specifications

Power Input	750 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,250 rpm
Impact rate at no-load speed	0 - 48,500 bpm
In concrete	16 mm
In steel	12 mm
In wood	25 mm
Weight	1.8 kg

### GSB 20-2 RE



HEAVY DUTY

#### Specifications

Rated Input Power	800 W
No-load Speed	0 - 1,100 / 3,000 rpm
Chuck Capacity	1.5-13 mm
Rated Speed	740 / 2 rpm
Rated Torque	5.2/2.0 Nm
Impact Rate	0-48,000 bpm
Weight	2.5 kg

## Magnetic Drill

### GBM 50-2



HEAVY DUTY

#### Specifications

Power	1,200 W
No-load Speed	50-255 / 100-510 rpm
Annular Cutter	Ø 50
Max. Twist Drill	Ø 23
Max Thread	M16
Magnetic Force	14,000 N
Weight	14.7 kg

## SDS Plus Hammer

### GBH 220



HEAVY DUTY

#### Specifications

Impact Energy	2 J
Power	720 W
No-load speed	0 - 2,000 rpm
Max. drilling concrete	22 mm
Mode	3 modes
Weight	2.3 kg

### GBH 2-24 DRE



HEAVY DUTY

#### Specifications

Power Input	790 W
Impact Energy	2.7 J
In Concrete	4 - 24 mm
Rated Speed	0 - 920 rpm
Impact Rate	0 - 4,100 bpm
Mode	3 modes
Weight	2.8 kg

### GBH 2-26 DRE



HEAVY DUTY

#### Specifications

Power Input	800 W
Impact Energy	2.7 J
In Concrete	4 - 26 mm
Rated Speed	0 - 900 rpm
Impact Rate	0 - 4,000 bpm
Mode	3 modes
Weight	2.7 kg

### GBH 2-28 DFV



HEAVY DUTY

#### Specifications

Power Input	820 W
Impact Energy	3.2 J
In Concrete	28 mm
Rated Speed	0 - 1,300 rpm
Impact Rate	0 - 5,100 bpm
Weight	3.1 kg

### GBH 3-28 DRE



HEAVY DUTY

#### Specifications

Power Input	800 W
Impact Energy	3.1 - 3.5 J
In Concrete	28 mm
Rated Speed	0 - 900 rpm
Impact Rate	0 - 4,000 bpm
Weight	3.6 kg

## SDS Plus Hammer

### GBH 4-32 DFR



HEAVY DUTY

#### Specifications

Power Input	900 W
Impact Energy	4.2 J
In Concrete	32 mm
Rated Speed	0 - 760 rpm
Impact Rate	0 - 3,600 bpm
Weight	4.7 kg

## SDS Max Hammer

### GBH 5-40 D



HEAVY DUTY

#### Specifications

Power Input	1,100 W
Impact Energy	(EPTA) 8.5 J
Max. App. in core cutter	90 mm
Rated Speed	170 - 340 rpm
Impact Rate	1,500 - 2,900 bpm
Weight	6.8 kg

### GBH 8-45 D



HEAVY DUTY

#### Specifications

Power Input	1500 W
Impact Rate	1,380 - 2,760 bpm
Impact Energy	12.5 J
Drilling Dia Concrete	12 mm - 45 mm
Rated Speed	150 - 305 rpm
Weight	8.5 kg

### GBH 8-45 DV



HEAVY DUTY

#### Specifications

Power Input	1500 W
Impact Rate	1,380 - 2,760 bpm
Impact Energy	12.5 J
Drilling Dia Concrete	12 mm - 45 mm
Rated Speed	150 - 305 rpm
Weight	8.5 kg

## Demolition Hammer

### GSH 3 E



HEAVY DUTY

#### Specifications

Power Input	650 W
Impact Rate	0-3,500 bpm
Impact Force	2.6 J
Weight	3.7 kg

## Demolition Hammer

### GSH 500

(Available in Hex and SDS Max)



#### Specifications

Power Input	1,100 W
Impact Energy - EPTA Value	7.8 J
Impact Rate	2,900 bpm
Auxiliary Handle	Straight Handle
Weight	5.6 kg

### GSH 5



HEAVY DUTY

#### Specifications

Power Input	1,100 W
Impact rate	2,850 bpm
Impact Energy	7.5 J
Weight	5.6 kg

### GSH 11 E



HEAVY DUTY

#### Specifications

Power Input	1,500 W
Impact Energy	16.8 J
Impact Rate	900-1,890 bpm
Vibration Value	18.5 m/s <sup>2</sup>
Weight	10.2 kg

## Breaker

### GSH 14 C



HEAVY DUTY

#### Specifications

Power Input	1,750 W
Impact Rate	1,900 - 1,950 bpm
Impact Force	28 J
Tool Holder	HEX 22 mm
Weight	14.6 kg

### GSH 16-30



HEAVY DUTY

#### Specifications

Power Input	1,750 W
Impact Rate	1,300 bpm
Impact Force	41 J
Weight	16.5 kg



## Breaker

### GSH 27 VC



HEAVY DUTY

#### Specifications

Power Input	2,000 W
Impact Rate	920 bpm
Impact Force	62 J
Weight	29.1 kg

## 4" Angle Grinder

### GWS 700



NEW

#### Specifications

Rated input power	710 W
Voltage	220 - 240 V
No-load speed	12,000 rpm
Disc diameter	100 mm
Grinding spindle thread	M10
Weight	1.6 kg

### GWS 6-100 S



#### Specifications

Rated Input Power	710 W
No-load Speed	11,000 rpm
Disc Diameter	100 mm
Back Switch	Toggle
Grinding Spindle Thread	M10
Weight	1.6 kg

### GWS 750-100



HEAVY DUTY

#### Specifications

Rated Input Power	750 W
No-load Speed	11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10
Weight	1.8 kg

### GWS 7-100 T



HEAVY DUTY

#### Specifications

Rated Input Power	720 W
No-load Speed	9,300 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10
Weight	1.8 kg

## 4" Angle Grinder

### GWS 900-100



HEAVY DUTY

#### Specifications

Rated Input Power	900 W
Lockable Switch	2-way
No-load Speed	11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10

### GWS 900-100 S



HEAVY DUTY

#### Specifications

Rated Input Power	900 W
Switch	Variable Speed
No-load Speed	2,800-11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10

### GWS 9-100 P



HEAVY DUTY

#### Specifications

Rated Input Power	900 W
Switch	Paddle Switch
No-load Speed	11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10

## 5" Angle Grinder

### GWS 12-125 S



HEAVY DUTY

NEW

#### Specifications

Rated Input Power	1200 W
Switch	Lockable Switch
No-load Speed	2,800 - 11,000 rpm
Disc Diameter	125 mm
Grinding Spindle Thread	M14

### GWS 14-125 S



HEAVY DUTY

NEW

#### Specifications

Rated Input Power	1400 W
Switch	Lockable Switch
No-load Speed	2,800 - 11,500 rpm
Disc Diameter	125 mm
Grinding Spindle Thread	M14

## 5" Angle Grinder

### GWX 14-125 (Xlock)



HEAVY DUTY

NEW

#### Specifications

Rated Input Power	1400 W
Switch	Lockable Switch
No-load Speed	11,000 rpm
Disc Diameter	125 mm
Grinding Spindle Thread	M14

## 7" Angle Grinder

### GWS 2200-180



#### Specifications

Power Input	2,200 W
No-load speed	8,500 rpm
Spindle thread	M14
Disc Diameter	180 mm
Weight	5 kg

## 9" Angle Grinder

### GWS 2200-230



#### Specifications

Power Input	2,200 W
No-load speed	8,500 rpm
Spindle thread	M14
Disc Diameter	230 mm
Weight	5 kg

## Straight Grinder

### GGX 3000L



#### Specifications

Power Input	300 W
Max. Collet Capacity	8 mm
No-load Speed	28,000 rpm
Weight	1.5 kg

### GGX 30 LS



HEAVY DUTY

NEW

#### Specifications

Power Input	750 W
Max. Collet Capacity	8 mm
No-load Speed	33,000 rpm
Weight	1.5 kg

## Bench Grinder

### GBG 35-15



HEAVY DUTY

#### Specifications

Rated input power	350 W
Grinding wheel diameter	150 mm
Grinding wheel widths	20 mm
No-load speed	3,000 rpm
Grinding wheel bore	20 mm
Grit	24, 60
Weight	10 kg

### GBG 60-20



HEAVY DUTY

#### Specifications

Rated input power	600 W
Grinding wheel diameter	200 mm
Grinding wheel widths	25 mm
No-load speed	3,600 rpm
Grinding wheel bore	32 mm
Grit	24, 60
Weight	15 kg

## Marble Saw

### GDC 140



HEAVY DUTY

#### Specifications

Rated input power	1,400 W
No-load speed	13,200 rpm
Cutting depth	35 mm
Disc diameter	115 mm
Weight	2.9 kg

## Reciprocating Saw

### GSA 120



#### Specifications

Input Power	1,200 W
Stroke Rate	0 - 3,000 spm
Stroke Length	29mm
Blade Change :	SDS
Max. Cutting Dept in Wood	220 mm
In Steel Plate	20 mm
Weight	3.7 kg

## AAC Block Cutter

### GAC 250



NEW

#### Specifications

Input Power	1,200 W
No load chain speed:	12 m/s
Chain bar length:	335mm
Max. cutting capacity:	250mm
Autoclaved aerated concrete (AAC) cutter	
Weight incl. accessories:	4.7kg

## Jigsaw

### GST 750



HEAVY DUTY

NEW

#### Specifications

No-load Stroke rate	800 - 3,200 rpm
Rated input power	520 W
Saw, stroke length	20 mm
Bevel angle	-45 - 45 °
Weight	2.29 kg

### GST 90 BE



HEAVY DUTY

#### Specifications

Rated input power	650 W
Stroke length	26 mm
No-load Stroke rate	500 - 3,100 spm
Cutting capacity	
-In wood	90 mm
-In Alluminium	20 mm
-In Steel (unalloyed)	10 mm
Weight	2.6 kg

## Circular Saw

### GKS 130



HEAVY DUTY

#### Specifications

Rated input power	1300 W
Saw blade diameter	184 mm
No-load speed	6,380 rpm
Saw blade bore diameter	20 mm
Baseplate	290 x 150 mm
Guide rail compatible	no
Weight	3.9 kg

### GKS 140



HEAVY DUTY

#### Specifications

Rated input power	1400 W
Saw blade diameter	184 mm
No-load speed	6,200 rpm
Saw blade bore diameter	20 mm
Baseplate	290 x 150 mm
Guide rail compatible	no
Weight	3.7 kg

### GKS 190



HEAVY DUTY

#### Specifications

Power Input	1,400 W
Blade Diameter	184 mm
Max. Cutting Capacities	
at 90°	67 mm
at 45°	48 mm
No-load Speed	5,500 rpm
Weight	4.1 kg

## Circular Saw

### GKS 235 TURBO



HEAVY DUTY

#### Specifications

Power Input	2,050 W
Saw Blade Diameter	235 mm
Max. Cutting Capacities	
at 90°	85 mm
at 45°	65 mm
No-load Speed	0 - 5,300 rpm
Weight	7.6 kg

## Mitre Saw

### GCM 10 MX



HEAVY DUTY

#### Specifications

Power Input	1,700 W
Blade Size	254 mm
Arbour Size	25.4 mm
No-load Speed	4,800 rpm
Max Mitre	45° L / 52° R
Max. Cutting Capacity	89 x 89 mm
Weight	13.5 kg

## Sliding Mitre Saw

### GCM 254 D



NEW

#### Specifications

Power Input	1,800 W
Blade Size	254 mm
Arbour Size	25.4 mm
No-load Speed	4,800 rpm
Max Mitre	45° L / 45° R
Max. Cutting Capacity	89 x 226 mm
Weight	24.2 kg

## Glide Mitre Saw

### GCM 12 GDL



HEAVY DUTY

#### Specifications

Power Input	2,000 W
Blade Size	305 mm
Arbour Size	30 mm
No-load Speed	4,000 rpm
Max Mitre	45° L / 45° R
Max. Cutting Capacity	89 x 226 mm
Weight	32.1 kg

## Table Saw

### GTS 254



#### Specifications

Power Input	1,800 W
Blade Size	254 mm
Arbour Size	30 mm
No-load Speed	4,300 rpm
Max Mitre	45° L / 45° R
Max. Cutting Capacity	555 x 555 mm
Weight	24.4 kg



## Table Saw

### GTS 10 J



HEAVY DUTY

#### Specifications

Power input	1,800 w
Saw Blade Diameter	254 mm
Table Size	642 x 549 mm
Bevel Setting	47° L / 2 ° R
Cutting capacity	
Right	625 mm
Left	255 mm
Weight	27 kg

### GTS 10 XC



HEAVY DUTY

#### Specifications

Power input	2,100 w
Saw Blade Diameter	254 mm
Table Size	640 x 705 mm
Bevel Setting	47° L / 1 ° R
Cutting capacity	
Right	635 mm
Left	250 mm

## Table Saw Stand

### GTA 60 W



HEAVY DUTY

#### Specifications

Height	622 mm
Length of work bench	1.220 mm
Dimensions of table when folded up	1220 x 740 x 510 mm

## Cut-off Saw

### GCO 220



HEAVY DUTY

#### Specifications

Power Input	2,200 W
No-load Speed	3,800 rpm
Disc Diameter	355 mm
Cutting Capacity	
Square Bar	<input type="checkbox"/> 119 x 119 mm
Round Bar	<input type="checkbox"/> 129 mm
Soft Start	No
Weight	14 kg

### GCO 14-24 J



HEAVY DUTY

#### Specifications

Power Input	2,400 W
Saw Blade Diameter	355 mm
Saw Blade Bore	25.4 mm
No-load Speed	3,800 rpm
Cutting Capacity	100 x 196 mm
	119 x 119 mm
	130 x 130 mm
Weight	18.1 kg

## Cold cut-off Saw

### GCD 12 JL



HEAVY DUTY

#### Specifications

Power Input	2,000 W
No-load speed	1,500 rpm
Saw Blade Diameter	305 mm
Cutting capacity at 45° mitre	85 mm x 85mm
Cutting capacity at rectangle 0°	158 x 100 mm
Cutting capacity at square 0°	100 x 100 mm
Cutting capacity at L-profile 0°	110 x 110 mm
Weight	20 kg

## Trimmer

### GKF 550



HEAVY DUTY

#### Specifications

Power Input	550 W
No-load Speed	33,000 rpm
Bix Size	6 mm / 1/4"
Weight	1.4 kg

## Plunge Router

### GOF 130



HEAVY DUTY

#### Specifications

Power	1,300 W
No-load speed	11,000 - 28,000 rpm
Bit Holder	6 - 8.0 mm
Plunge depth	55 mm
Weight	3.5 kg

## Planer

### GHO 6500



HEAVY DUTY

#### Specifications

Power Input	650 W
No-load Speed	16,500 rpm
Adjustable Chip Thickness	0 - 2.6 mm
Adjustable Rebating Depth	0 - 9 mm
Weight	2.8 kg

### GHO 10-82



HEAVY DUTY

#### Specifications

Power Input	710 W
Planing width	82 mm
Planing depth	0 - 1 mm
Adjustable rebating depth	0-9 mm
No-load speed	16,500 rpm
Weight	2.5 kg

## Orbital Sander

### GSS 140



HEAVY DUTY

#### Specifications

Power Input	220
No-load Speed	14,000 rpm
No-load Orbital Stroke Rate	28,000 min-1
Orbital Diameter	1.5 mm
Sanding Sheet Dimension	114 x 140 mm
Sanding Plate Dimension	101 x 112 mm
Weight	1.2 kg

### GSS 2300



#### Specifications

Power input	190 W
No-load speed	12,000 rpm
No-load orb. stroke	24,000 opm
Oscillating circuit dia.	2 mm
Sanding plate	92 mm x 182 mm

## Random Orbit Sander

### GEX 125-1AE



HEAVY DUTY

#### Specifications

Power Input	250 W
No-load Speed	7,500 - 12,000 rpm
Oscillating Circuit	
Diameter	2.5 mm
Orbit Rate	15,000 - 24,000 opm
Sanding Plate	125 mm
Weight	1.3 kg

## Drywall Sander

### GTR 550



#### Specifications

Rated input power	550 W
No-load speed	340 - 910 rpm
Sanding pad dia.	215 mm
Sanding pad type	One pad + Intermediate pad
Tool Height	210 mm
Width	250 mm
Length	1,730 mm

## Polisher

### GPO 950



HEAVY DUTY

#### Specifications

No-load speed	600 2,100 rpm
Rated input power	950 W
Grinding spindle thread	M14
Polishing sponge, diameter	180 mm
Tool dimensions (width)	118 mm
Tool dimensions (length)	325 mm
Tool dimensions (height)	224 mm
Weight	2.3 kg

## Polisher

### GPO 12 CE



HEAVY DUTY

#### Specifications

Power Input	1,250 W
No-load Speed	750 - 3,000 rpm
Polishing Disc Diameter	180 mm
Thread of Polishing Spindle	M14
Tool Length	450 mm
Weight	2.5 kg

## Heat Gun

### GHG 18-60



HEAVY DUTY

#### Specifications

Rated input power	1,800 W
Working temperature	50 - 600 °C
Airflow	250 - 600 l/min
Control, airflow	3-stage

### GHG 20-63



HEAVY DUTY

#### Specifications

Rated input power	2,000 W
Working temperature	50 - 630 °C
Airflow	150 - 500 l/min
Control, airflow	3-stage
Digital display	Yes

## Blower

### GBL 620



HEAVY DUTY

#### Specifications

Power Input	620 W
No-load Speed	16,000 rpm
Air Flow Rate	3.5 m3/min
Weight	1.7 kg

### GBL 82-270



HEAVY DUTY

#### Specifications

Rated input power	820 W
Weight	2.25 kg
Volumetric flow rate	4.5 m³/min
No-load speed	16,000 rpm

## Vacuum

### GAS 15



HEAVY DUTY

#### Specifications

Rated input power	1,100 W
Container (gross/net)	15 / 10 litre
Airflow rate	53 l/s
Vacuum pressure	270 mbar
Weight	6 kg

### GAS 12-25 PL



HEAVY DUTY

#### Specifications

Rated input power	1,250 W
Container (gross/net)	25 / 21 litre
Airflow rate	65 l/s
Vacuum pressure	200 mbar
Weight	9 kg





# DUST FREE SOLUTION



## DUST CUP

For GSB & GBH  
Holes 4-36mm  
Works w/o vacuum



## GDE 24

For GSB & GBH  
Holes 4-26 mm  
work with / without vacuum



## GDE 18V-16

Only for GBH 18V-26  
Holes 4 – 16 mm  
Self-vacuum



## GDE 12

Dust Extractor for GBH 185-LI  
Max. Drilling depth 100 mm  
Auto-power; HEPA Filter;  
Bit target; LED light



## GDE 68

For GSB & GBH  
Holes or core cutter 4 – 68 mm



## GDE 16 plus

For GSB, GBH & GBM  
50 mm collar tool,  
Holes 4-16 mm



## GDE MAX

For GSH, chiselling  
Max. Length 600 mm



## GDE HEX

For GSH, breaking



## GDE 125 EA-T

For GWS Series  
Disc 125 mm  
Max cut. depth 25 mm





# BOSCH MEASURING TOOLS

## Laser Measure

### GLM 150 C



Specifications	
Measuring Range	: 0.08 - 150 m
Measuring Accuracy	: ± 1.5 mm*
Measuring Units	: m, cm, ft, in
Laser Diode	: 650 nm, <1mW
Batteries	: 3 x 1.5V LR6 (AA)
Weight	: 0.23 kg

### GLM 100-25 C



Specifications	
Measuring Range	: 0.08 - 100 m
Measuring Accuracy	: ± 1.5 mm*
Measuring Units	: m, cm, ft, in
Laser Diode	: 650 nm, <1mW
Batteries	: 3 x 1.5V LR6 (AA)
Weight	: 0.23 kg

### GLM 50-27 CG



Specifications	
Measuring Range	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm*
Measuring Units	: m, cm, ft, in
Laser Diode	: 515 nm, <1mW
Batteries	: 2 x 1.5V LR6 (AA) or BA 3.7V
Weight	: 0.2 kg

### GLM 50-23 G



Specifications	
Measuring Range	: 0.05 - 50 m
Measuring Accuracy	: ± 1.5 mm*
Measuring Units	: m, cm, ft, in
Laser Diode	: 515 nm, <1mW
Batteries	: 2 x 1.5V LR6 (AA) or BA 3.7V
Weight	: 0.2 kg

### GLM 400



Specifications	
Working Range	: 0.05 - 40 m
Measuring Accuracy	: ± 1.5 mm*
Measuring Units	: m, cm, ft, in
Laser Diode	: 635 nm, <1mW
Batteries	: 2 x 1.5V LR03 (AAA)
Weight	: 0.1 kg

## Laser Measure

### GLM 40



Specifications	
Working Range	: 0.05 - 40 m
Measuring Accuracy	: ± 2 mm*
Measuring Units	: m, cm, ft, in
Laser Diode	: 635 nm, <1mW
Batteries	: 2 x 1.5V LR03 (AAA)
Weight	: 0.1 kg

### GLM 30-23



Specifications	
Working Range	: 0.15 - 30 m
Measuring Accuracy	: ± 1.5 mm*
Measuring Units	: m, cm, ft, in
Laser Diode	: 635 nm, <1mW
Batteries	: 2 x 1.5V LR03 (AAA)
Weight	: 0.1 kg

## Chargeable Battery

### BA 3.7V



Specifications	
Battery Type	: Li-Ion
USB Connection	: Type C
Rated Voltage	: 3.7 V
Charging Voltage	: 5.0 V

## Angle Mesurer

### GAM 220



Specifications	
Measurement Range	: 0 - 220°
Accuracy, Angles	: ± 0.1°
Accuracy, Calculation	: ± 0.1°
Arm Length	: 40 cm
Batteries	: 4 x 1.5V LR6 (AA)
Weight	: 1.3 kg

## Inclinometer

### GIM 60L



Specifications	
Measurement Range	: 0-360°(4x90°)
Laser working range	: 30 m
Measurement Accuracy 0°/90°	: ±0.05°
Measurement Accuracy 1°-89°	: ± 0.1°
Batteries	: 4 x 1.5V LR03 (AAA)
Weight	: 0.91 kg

## Green Line Laser

### GLL 3-80 CG



Specifications	
Working Range	: 30 m
With Receiver	: 120 m
Leveling Accuracy	: ± 0.2 mm/m
Self-levelling Range	: ± 4°
Laser Diode	: 500-540nm, <10mW
Tripod Thread	: 1/4" & 5/8"
Batteries	: 12V Li-ion batt. / 4 x 1.5V LR6 (AA)
Weight	: 0.9 kg
Laser Receiver	: LR 7

### GLL 3-60 XG



Specifications	
Working Range	: 30 m
With Receiver	: 60 m
Leveling Accuracy	: ± 0.3 mm/m
Self-levelling Range	: ± 3°
Laser Diode	: 500-540nm, <10 mW
Tripod Mount	: 1/4" & 5/8"
Batteries	: 4 x 1.5V LR6 (AA)
Weight	: 0.78 kg
Laser Receiver	: LR 7

### GLL 50 G



Specifications	
Working Range	: 15 m
Leveling Accuracy	: ± 0.6 mm/m
Self-levelling Range	: ± 3.5°
Laser Diode	: 500-540 nm, <5mW
Tripod Mount	: 1/4"
Batteries	: 2 X 1.5VLR6 (AA) / BA 3.7 V Li-ion
Weight	: 0.3 kg

## Rotation Laser

### GRL 300 HVG PROF



Specifications	
Working Range	: 100m (Diameter)
With Receiver	: 300m (Diameter)
Leveling accuracy	: ± 3mm at 30m
Self-levelling Range	: ± 5° (8%)
Laser class	: 3R
Batteries	: 2xD-cell Batteries
Laser Diode	: 532 nm, < 5 mW
Tripod Thread	: 5/8"
Weight	: 1.8 kg
Laser Receiver	: LR 1G



## Combi Laser

### GCL 2-50 CG



Specifications	
Working Range	: 20 m
With Receiver	: 50 m
Leveling Accuracy	: ± 0.3 mm/m
Self-levelling Range	: ± 4°
Laser Diode	: 500-540nm, <10 mW
Tripod Mount	: 1/4"
Batteries	: 12V Li-Ion battery / 4 x 1.5V LR6 (AA)
Weight	: 0.6 kg
Laser Receiver	: LR 7

### GCL 2-15 G



Specifications	
Working Range	: 15 m
Leveling Accuracy	: ± 0.3 mm/m
Self-levelling Range	: ± 4°
Laser Diode	: 500-540nm, <10mW
Tripod Mount	: 1/4" & 5/8"
Batteries	: 3 x 1.5V LR6 (AA)
Weight	: 0.49 kg
Projection	: 2 lines, 2 points

## Point Laser

### GPL 5 G



Specifications	
Working Range	: 30 m
Leveling Accuracy	: ± 0.35 mm/m
Self-levelling Range	: ± 4°
Laser Diode	: <1mW, 500-540 nm
Tripod Mount	: 1/4"
Batteries	: 2 x 1.5V LR6 (AA)
Weight	: 0.35 kg
Projection	: 5 points

### GPL 3 G



Specifications	
Working Range	: 30 m
Leveling Accuracy	: ± 0.35 mm/m
Self-levelling Range	: ± 4°
Laser Diode	: <1mW, 500-540 nm
Tripod Mount	: 1/4"
Batteries	: 2 x 1.5V LR6 (AA)
Weight	: 0.35 kg
Projection	: 3 points

## Rotation Laser

### GRL 350 HV



Specifications	
Working Range	: 60m
With Receiver	: 350m (Diameter)
Leveling accuracy	: ± 3mm at 30m
Self-levelling Range	: ± 5° (8%)
Batteries	: 2 x D-cell Batteries
Laser Diode	: 630-650nm, <5mW
Tripod Thread	: 5/8"
Weight	: 1.8 kg
Laser Receiver	: LR 45



## Red Line Laser

### GLL 3-80



Specifications	
Working Range	: 30 m
With Receiver	: 120 m
Leveling Accuracy	: ± 0.2 mm/m
Self-levelling Range	: ± 4°
Laser Diode	: 630-650nm, <10mW
Tripod Thread	: 1/4" & 5/8"
Batteries	: 4 x 1.5V LR6 (AA)
Weight	: 0.82 kg
Laser Receiver	: LR 6

### GCL 25



Specifications	
Working Range	: 10 m
Leveling Accuracy	: ± 0.3 mm/m
Plumb Point Accuracy	: ± 0.7 mm/m
Self-levelling Range	: ± 4°
Laser Diode	: 630-650nm, <10 mW
Tripod Mount	: 1/4" & 5/8"
Batteries	: 4 x 1.5V LR6 (AA)
Weight	: 0.6 kg
Projection	: 2 lines, 5 points

### GLL 5-50 X



Specifications	
Working Range	: 15 m
With Receiver	: 50 m
Leveling Accuracy	: ± 0.2 mm/m
Self-levelling Range	: ± 3°
Laser Diode	: 630-650nm, <10mW
Tripod Thread	: 5/8"
Batteries	: 4 x 1.5V LR6 (AA)
Weight	: 0.5 kg
Laser Receiver	: LR 6

### GLL 3-15 X



Specifications	
Working Range	: 15 m
Leveling Accuracy	: ± 0.2 mm/m*
Self-levelling Range	: ± 3°
Laser Diode	: 630-650nm, <10mW
Tripod Thread	: 5/8"
Batteries	: 4 x 1.5V LR6 (AA)
Weight	: 0.72 kg
Projection	: 3 lines, 1 point

### GLL 3 X



Specifications	
Working Range	: 15 m
Leveling Accuracy	: ± 0.5 mm/m*
Self-levelling Range	: ± 4°
Laser Diode	: 635 nm, < 10mW
Tripod Thread	: 1/4"
Batteries	: 4 x 1.5V LR6 (AA)
Weight	: 0.5 kg

## Optical Laser

### GOL 32 D



Specifications	
Magnification	: 32x
Levelling Accuracy	: 1 mm/30 m
Working Range	: 120 m
Tripod Thread	: 5/8"
Weight	: 1.5 kg

### GOL 26 D



Specifications	
Magnification	: 26x
Levelling Accuracy	: 1.6 mm/30 m
Working Range	: 100 m
Tripod Thread	: 5/8"
Weight	: 1.7 kg

## Measuring Rod

### GR 500



Specifications	
For GOL 26 D / GOL 32 D	
Length	: 5m
Sections	: 5
Units of Measurement	: m/cm

## Telescopic Pole

### BT 350



Specifications	
Work Height	: 140 - 350 cm
Thread	: 1/4"
Sections	: 3
Weight	: 2.5 kg

## Tripod

### BT 160



Specifications	
Work Height	: 97 - 160 cm
Tripod Thread	: 5/8"
Weight	: 4.1 kg

## Tripod

### BT 150-5/8



Specifications	
Work Height	: 52 - 154 cm
Tripod Thread	: 5/8"
Weight	: 1.1 kg

### BT 150



Specifications	
Work Height	: 55 - 157 cm
Tripod Thread	: 1/4"
Weight	: 1.3 kg

## Laser Receiver

### LR 6



Specifications	
Accuracy	: ± 1 mm/± 3 mm
Weight	: 120 g
Battery	: 2 x 1.5 V LR03 (AAA) For GLL 5-50 X, GLL 3-80

### LR 7



Specifications	
Accuracy	: ± 1 mm/± 3 mm
Weight	: 150 g
Batteries	: 2 x 1.5V LR6 (AAA) For GCL 2-50 CG / GLL 3-80 CG / GLL 3-60 XG

## Rotating Mount

### RM 3



Specifications	
Height	: 120 mm
Length	: 135 mm
Weight	: 0.500 kg
	For GLL 3-80 CG, GCL 2-50 CG

## Building Mount

### BM 1



Specifications	
Mount Thread	: 1/4"
Weight	: 0.5 kg

## Wall Scanner / Detector

### D-TECT 200 C



Specifications	
Max. Measuring Depth	: 200 mm
Accuracy	: ± 5 mm*
Batteries	: 12V Li-Ion batt / 4 x 1.5V LR6(AA)
Detectable Materials	: Magnetic & non-magnetic materials, live and non- live cables, wood, plastic pipes

### D-TECT 120



Specifications	
Max. Measuring Depth	: 120 mm
Accuracy	: ± 10 mm*
Batteries	: 12V Li-Ion batt / 4 x 1.5V LR6(AA)
Detectable Materials	: Magnetic & non-magnetic materials, live and non- live cables, wood, water - filled plastic pipes

### GMS 120



Specifications	
Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9V 6LR61

## Inspection Camera

### GIC 4-23 C



Specifications	
Display size	: 4.3"
Length of camera cable	: 150 cm
Display Resolution	: 800 x 480 px
Focus distance	: 30-80 mm
Documentation	: via photo
Data transfer	: USB-C®
Batteries	: 12V Li-Ion batt / 4 x 1.5V LR6(AA)
Weight	: 0.7 kg

## Inspection Camera

### GIC 5-27 C



Specifications	
Display size	: 5"
Length of camera cable	: 150 cm
Display Resolution	: 1280 x 720 px
Focus distance	: 30-80 mm
Documentation	: photo, video
Data transfer	: USB-C®, Micro SD card
Batteries	: 12V Li-Ion batt / 4 x 1.5V LR6(AA)
Weight	: 0.7 kg

## Thermal Camera

### GTC 600 C



Specifications	
Temperature Range	: -20 to +600°C
Measurement Accuracy	: ± 2.0°C
Size of IR Sensor	: 256 x 192 px
Batteries	: 12V Li-Ion batt / 4 x 1.5V LR6(AA)
Weight	: 0.6 kg

### GTC 400 C



Specifications	
Temperature Range	: -10 to +400°C
Measurement Accuracy	: ± 3.0°C
Size of IR Sensor	: 160 x 120 px
Batteries	: 12V Li-Ion batt / 4 x 1.5V LR6(AA)
Weight	: 0.54 kg

## Thermal Detector

### GIS 1000 C



Specifications	
Temperature Range	: -40 to +1000°C
Measurement Accuracy	: ± 1.0°C
Size of Display	: 2.8"
Batteries	: 12V Li-Ion batt / 4 x 1.5V LR6(AA)
Weight	: 0.56 kg

### GIS 500



Specifications	
Measurement Range	: -30°C to +500°
Measurement Accuracy	: ± 1.8°C
Batteries	: 2 x 1.5V LR6 (AA)
Weight	: .22 kg




# BOSCH PROFESSIONAL ACCESSORIES



## Cutting and Grinding Disc

Application / Material	Metal	Metal	Metal	Metal	Metal	Inox/ Stainless Steel	Inox/ Stainless Steel	Inox/ Stainless Steel	GI/ Cast Iron/ Steel Sheet/ Metal Pipe	Wood/ Wood with Nail/ Aluminum/ Acrylic/ Plastic	Inox/ Stainless Steel	Inox/ Stainless Steel	Hard Ceramic	Wood/ Wood with Nail/ Aluminum/ Acrylic/ Plastic	Wood/ Paint	Wood/ Paint
Description	4-inch Grinding Disc for Metal	4-inch Cutting Disc for Metal 1.2mm	4-inch Grinding Disc for Metal	4-inch Cutting Disc for Metal 2.5 x 16.0 mm	New!! 4-inch Cutting Disc for Metal 1.2 x 16.0mm	New!! 4-inch Expert for INOX Cutting Disc	4-inch Flexible Grinding Disc for INOX	4-inch Grinding Disc for INOX	Diamond Metal Cutting 105x20/ 16mm	Carbide Multi Wheel 110x20/ 16mm	76mm Grinding Disc for INOX	76mm Cutting Disc for INOX	New!! 76mm DCD for Tile Turbo Continuous	76mm Carbide Multi Wheel 260862-3011	Flap Disc Grit 36 (10+1 pack)	Flap Disc Grit 60 (10+1 pack)
Packaging	25	25	25	25	25	25	25	25	1	1	5 pcs	1	1	1	11	11

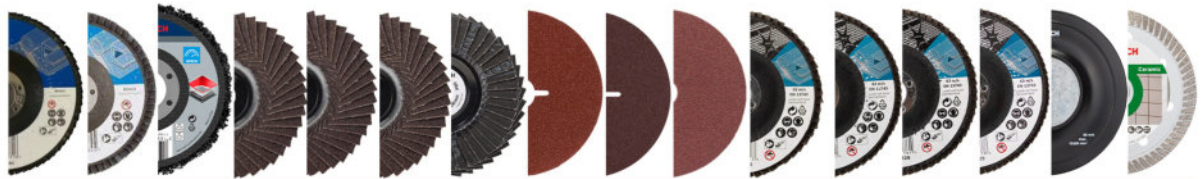

## Cutting and Grinding Disc

Application / Material	Wood/ Paint	Wood/ Paint	Wood/ Paint	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	Metal/ Wood	4" Fibre Disc System AC	Tiles/ Ceramic
Description	Flap Disc Grit 80 (10+1 pack)	Flap Disc Grit 120 (10+1 pack)	New!! 4-inch Clean & Strip Disc 100mm x 16mm	Flexible Flap Disc X435 - 100mm P40	Flexible Flap Disc X435 - 100mm P60	Flexible Flap Disc X435 - 100mm P80	Flexible Flap Disc X435 - 100mm P100	4" Fiber Disc - 100mm Expert for Metal P60	4" Fiber Disc - 100mm Expert for Metal P80	4" Fiber Disc - 100mm Expert for Metal P100	PRO X571 100mm P40	PRO X571 100mm P60	PRO X571 100mm P80	PRO X571 100mm P120	Backing Pad	4" Turbo Disc for Tile/ Ceramic		
Packaging	11	11	5	10	10	10	10	25	25	25	10	10	10	10	1	10		



## Cutting and Grinding Disc

Application / Material	Tiles/ Ceramic	Granite/ Marble/ Stones	Tiles/ Ceramic/ Stone/ Concrete	Stone	Ceramic	
Description	4" Continuous Rim ideal for cutting Tiles	New!! 4" Segmented for stone	4" Expert for Universal Cup Wheel	Q1 2024 AC 4" DCD Standard for Universal	Q1 2024 AC 4" DCD Standard for Stone	Q1 2024 AC 4" DCD Standard for Ceramic
Packaging	10	10	1	25	25	25







	System AC								Cuting and Grinding Disc						
Application / Material	System AC for 4" Grinders	System AC for 4" Grinders	System AC for 4" Grinders	System AC for 4" Grinders	System AC for 4" Grinders	System AC for 4" Grinders	System AC for 4" Grinders	System AC for 4" Grinders	Sytem AC for Grinding		System AC for 7" Grinders	Metal	Metal	Tile / Ceramic	
Description	Wire Cup Brush (M10)	Flange (M10)	Nut (M10)	Pin Spanner	Auxiliary Handle	Anti-Vibration-Auxiliary Handle-2602025171	4" Grinder Guard-Grinding	4" Grinder Guard - Cutting	Dust Extraction Guard - Grinding	Dust Guard - Cutting - GWS 060	Pin Spanner	5-inch Grinding Disc for Metal	5-inch Cutting Disc for Metal	<b>New!!</b> 5 Inch Segmented Diamond Disc - Universal	
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	



	XLock															
Application / Material	Metal	Metal	Inox / Stainless Steel	Tile / Ceramic / Concrete / Masonry	Tile / Ceramic / Concrete / Masonry	Wood / Wood with Nail / Aluminum Acrylic / Plastic	Wood / Wood with Nail / Aluminum Acrylic / Plastic	Metal	Metal	Metal	Metal	Inox / Stainless Steel	Inox / Stainless Steel	Metal	Metal	Tile / Ceramic / Concrete / Masonry
Description	X-LOCK Expert for Metal Cutting 125x1.6x22.23mm	X-LOCK Expert for Metal Grinding 125x6x22.23mm	X-LOCK Standard for Inox Cutting 125x1x22.23mm	X-LOCK Standard for Ceramic 125 x 22,23 x 1,6 x 7 mm	X-LOCK Standard for Universal 125 x 22,23 x 2,0 x 10 mm	X-LOCK Carbide Multi Wheel 125mm	DMW X-LOCK 125x22.23mm	X-LOCK Flap discs, Ø125 mm, G 40, X571, Best for Metal	X-LOCK Flap discs, G 60, X571, Best for Metal	X-LOCK Flap discs, Ø125mm, G 80, Best for Metal	X-LOCK Flap discs, Ø125mm, G 120, X571, Best for Metal	7-inch Cutting Disc for Metal - INOX 1.6mm	7-inch Cutting Disc for Metal - INOX 2.0mm	7-inch Grinding Disc for Metal	7-inch Cutting Disc for Metal	7-inch Universal DCD
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1



	Cutting and Grinding Disc								Polisher								
Application / Material	Metal	Metal	Tile / Ceramic / Concrete / Masonry	Metal	Metal	Metal	Metal	Concrete Cutting	Metal/Grinding	SYSTEM AC for Polishing Application							
Description	9-inch Grinding Disc for Metal	9-inch Cutting Disc for Metal	<b>New!!</b> 9-inch Universal DCD	14-inch Cutting Disc for Metal (Double-ply)	14-inch Cutting Disc Standard for Metal (Doble-ply)	14-inch Cutting Disc Expert for Heavy Metal (Single-ply)	14-inch Cutting Disc Standard for Metal (Single-ply)	350mm 10mm Standard for Concrete 14-inch	EXPERT Diamond Metal Wheel 355mm x 25.4mm Cutting Disc	Lambswool Bonnet (180 mm)	Polishing Sponge	Backing Pad (150 mm) M14	230mm lambswool bonnet (outer dia.), 100% twisted wool	180mm polishing sponge, medium, flat	180mm polishing sponge, soft, flat	180mm polishing sponge, extra soft, wave	
Packaging	1	1	1	1	1	1	1	1	1	2 pcs	5 pcs	1	1	1	1	1	



	GEX Acc								Polisher							
Application / Material	System AC for Sanding				System AC for Polishing				Wood + Paint							
Description	GEX 125-1 AE - Rubber backing pad (125mm), medium	<b>New!!</b> Intermediate Pad 125MM (2pcs pack)	Bosch Net 125 Grit 80 Grit 100 Grit 120 Grit 150 Grit 180 Grit 220 Grit 240 Grit 320 Grit 400	Bosch Disc 125 Grit 60 Grit 80 Grit 100 Grit 120	Bosch Disc 125 Grit 180 Grit 240	E466 125mm-8 hole 40# 60# 80#	E466 125mm-8 hole 120# 180# 240# 320#	Lambswool bonnet (130mm)	Polishing sponge (130mm)	Expert Net M480 125mm 80 100 120 150 180 220 240 320	Expert Net M480 125mm 400	Expert Net M480+ Saver 125mm 6+1 Set	Bosch Net 225mm G120 G150 G180 G220 G240	Expert Net M480 225mm P80 P120 P180 P240	Expert Net M480 225mm 6+1 Start Kit	
Packaging	1	2 pcs	5	50 / box	100 / box	5	5	1	1	5 pcs	5 pcs	5 pcs	25	5 pcs	7 pcs	





	HSS-G Metal Drill				HSS Step Drill Bit		Bosch HSS-Co Metal Drill Bit	
<b>Application / Material</b>	(Metals) Non-alloyed, structural steel, Sheet metal, Non-alloyed tool steel, Alloyed tool steel, Stainless steel, Cast iron, Malleable cast iron, Cast steel, Alloyed Aluminum, Alloyed copper, Bronze, (Plastics) PVC, polyamide, Perspex, Bakelite, Pertinax, Formican, Hard Rubber				(Metals) Non-alloyed structural steel, Sheet metal, Non-alloyed tool steel, Alloyed tool steel, Stainless steel, Cast iron, Malleable cast iron, Cast steel, Alloyed Aluminum, Alloyed copper, Bronze, (Plastics) PVC, polyamide, Perspex, Bakelite, Pertinax, Formican, Hard Rubber		(Metals) Alloyed tool steel, Stainless steel, Fireproof Steel, Spring Steel, Cast iron, Malleable cast iron, Cast steel, Magnesium	
<b>Description</b>	Ø 5/64" Ø 3/32" Ø 7/64" Ø 1/8" Ø 9/64" Ø 5/32" Ø 3/16"	Ø 1/4" Ø 5/16" Ø 3/8" Ø 1/2" Ø 9/16" Ø 5/8" Ø 3/4"	Ø 1/8" Ø 5/32" Ø 3/16" Ø 1/16" Ø 5/64"	Ø 3/32" Ø 7/64" Ø 9/64" Ø 1/4" Ø 5/16"	Ø 3/8" Ø 1/2"	HSS step drill bit; 9 steps; 4-20 mm, hex shank 1/4"  HSS step drill bit; 12 steps; 6-39 mm	Bosch HSS-Co metal drill bit Ø 1/16" Bosch HSS-Co metal drill bit Ø 5/64" Bosch HSS-Co metal drill bit Ø 3/32" Bosch HSS-Co metal drill bit Ø 7/64" Bosch HSS-Co metal drill bit Ø 1/8" Bosch HSS-Co metal drill bit Ø 9/64" Bosch HSS-Co metal drill bit Ø 5/32" Bosch HSS-Co metal drill bit Ø 3/16" Bosch HSS-Co metal drill bit Ø 1/4" Bosch HSS-Co metal drill bit Ø 5/16" Bosch HSS-Co metal drill bit Ø 3/8"	
<b>Packaging</b>	1	1	10	1	1	1	1	



	Bosch HSS-Co Metal Drill Bit	TCT Holesaw	Holesaw Progressor			
<b>Application / Material</b>	(Metals) Alloyed tool steel, Stainless steel, Fireproof Steel, Spring Steel, Cast iron, Malleable cast iron, Cast steel, Magnesium	Metal / Stainless				
<b>Description</b>	Bosch HSS-Co metal drill bit Ø 3.0" 10 pcs pack Bosch HSS-Co metal drill bit Ø 3.2" 10 pcs pack Bosch HSS-Co metal drill bit Ø 3.5" 10 pcs pack Bosch HSS-Co metal drill bit Ø 4.0" 10 pcs pack Bosch HSS-Co metal drill bit Ø 4.5" 10 pcs pack Bosch HSS-Co metal drill bit Ø 5.0" 10 pcs pack Bosch HSS-Co metal drill bit Ø 5.5" 10 pcs pack Bosch HSS-Co metal drill bit Ø 6.0" 10 pcs pack Bosch HSS-Co metal drill bit Ø 6.5" 10 pcs pack Bosch HSS-Co metal drill bit Ø 7.0" 10 pcs pack Bosch HSS-Co metal drill bit Ø 7.5" 10 pcs pack	20 mm TCT Holesaw TMS-20 22mm TCT Holesaw TMS-22 25mm TCT Holesaw TMS-25 27mm TCT Holesaw TMS-27 32 mm TCT Holesaw TMS-32 35 mm TCT Holesaw TMS-35 38 mm TCT Holesaw TMS-38 41 mm TCT Holesaw TMS-41 51 mm TCT Holesaw TMS-51	Holesaw Progressor:16MM / Holesaw Progressor:19MM Holesaw Progressor:20MM / Holesaw Progressor:22MM Holesaw Progressor:25MM / Holesaw Progressor:27MM Holesaw Progressor:30MM / Holesaw Progressor:32MM Holesaw Progressor:35MM / Holesaw Progressor:38MM Holesaw Progressor:40MM / Holesaw Progressor:44MM Holesaw Progressor:48MM / Holesaw Progressor:51MM Holesaw Progressor:54MM / Holesaw Progressor:60MM Holesaw Progressor:64MM / Holesaw Progressor:70MM Holesaw Progressor:102MM / Holesaw Progressor:127MM Holesaw Progressor:152MM	PC Plus mandrel 3/8" 8.7 mm incl. HSS-G drill bit 7.15x85mm  PC Plus mandrel SDS plus 8.7mm incl. HSS-G drill bit 7.15x85mm	6pcs Holesaw Adapter	HSS-G Ø 7.15x85 mm Pilot HSS-Co Ø 7.15x85 mm Pilot HSS-Co Ø 7.15x65 mm Pilot
<b>Packaging</b>	10	1	1	1	1	1



	Bi-metal Hole Saw	TCT Annular Cutter	Pin	Cutting Oil	Hex-9 MultiConstruct	
<b>Application / Material</b>	Metal / Wood / Aluminum / Plastic	Metal / Wood / Aluminum / Plastic		Impact Drills / Rotary Drills		
<b>Description</b>	16mm = 5/8" 19mm = 3/4" 20mm = 25/32" 22mm = 7/8" 25mm = 1" 27mm = 1 1/16" 30mm = 1 3/16" 32mm = 1 1/4" 35mm = 1 3/8" 38mm = 1 1/2" 40mm = 1 9/16" 44mm = 1 3/4"	48mm = 1 7/8" 51mm = 2" 54mm = 2 1/8" 60mm = 2 3/8" 64mm = 2 1/2" 76mm = 3" 102mm = 4" 127mm = 5" 152mm = 6"	14x50mm 16x50mm 18x50mm 20x50mm 22x50mm 24x50mm 26x50mm 28x50mm 30x50mm 32x50mm 35x50mm 40x50mm	PIN, PL6050 (6.34x106mm)  PIN, PL8050 (8x106mm)	UNIVERSAL CUTTING OIL	HEX-9 Multi Construct 3x45x90 HEX-9 Multi Construct 4x45x90 HEX-9 Multi Construct 5x50x100 HEX-9 Multi Construct 5.5x60x100 HEX-9 Multi Construct 6x60x100 HEX-9 Multi Construct 6.5x60x100 HEX-9 Multi Construct 8x50x100 HEX-9 Multi Construct 10x90x150 HEX-9 MultiConstruct 12.0x90x100 HEX-9 MultiConst Spc - 4.0, 5.0, 6.0, 6.0, 8.0
<b>Packaging</b>	1	1	1	1	1	



	Hex-9 MultiConstruct	Masonry Drill Bits			
<b>Application / Material</b>	Tile / Ceramic	Masonry / Limestone			
<b>Description</b>	Hex - 9 Hardtile drill bit 3mm x 90mm Hex - 9 Hardtile drill bit 4mm x 90mm Hex - 9 Hardtile drill bit 5mm x 90mm Hex - 9 Hardtile drill bit 6mm x 90mm Hex - 9 Hardtile drill bit 8mm x 90mm Hex - 9 Hardtile drill bit 10mm x 90mm Hex - 9 Hardtile drill bit 12mm x 90mm 3pcs Hex - 9 Hardtile drill bit set 5 / 6 / 8mm X 90mm	3.0 mm X 30 mm X 60 mm 4.0 mm X 40 mm X 75 mm 5.0 mm X 50 mm X 85 mm 5.5 mm X 50 mm X 85 mm 6.0 mm X 60 mm X 100 mm 6.5 mm X 60 mm X 100 mm 8.0 mm X 80 mm X 120 mm 9.0 mm X 80 mm X 120 mm 10.0 mm X 80 mm X 120 mm	12.0 mm X 90 mm X 150 mm 14.0 mm X 90 mm X 150 mm 16.0 mm X 90 mm X 150 mm Set (6.0 / 8.0 / 10.0) (1)- 3 pcs set Set (4.0 / 5.0 / 6.0 / 8.0 / 10.0) (2)- 5 pcs set Set (3.0 / 4.0 / 5.0 / 6.0 / 7.0 / 8.0 / 9.0 / 10.0) (3) - 8 pcs set		
<b>Packaging</b>	1	1	1	1	3pcs/set 5pcs/set 8pcs/set











**Circular Saw Blades**

Application / Material	Wood	Multi Material	Wood	Aluminum	Aluminum	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood
Description	85MM x1.1/0.7x15 T20	Standard for Multi Material 85x15x1.5 /1x30T	<b>New!!</b> EXPERT FOR WOOD H 140X20-42	Standard for Aluminum 165x30x1.8/1.3x54T	<b>New!!</b> Expert for Aluminum 165 X 1.8/1.3 X 20, 54T	Expert for Wood 165 x 20 x 2.6/1.6 x 24T	Expert for Wood 165 x 20 x 2.6/1.6 x 48T	Best for Wood 165 x 20 x 2.6/1.6 x 48T	Expert for Wood 190MM X 30MM X 24T	Expert for Wood 190MM X 30MM X 40T	Expert for Wood 190MM X 30MM X 56T	Expert for Wood 190 X 1.5 X 1.0 X 30, 24T	Expert for Wood 190 X 1.5 X 1.0 X 30, 48T	Expert for Wood 190 X 1.5 X 1.0 X 30, 60T	BEST FOR WOOD 216X30X48 T	Exp WO B 216x30x48T
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1



**Circular Saw Blades**

Application / Material	Multi Material	Multi Material	Wood	Wood	Aluminum	Multi Material	Wood	Wood	Wood	Wood	Wood	Wood	Aluminum	Multi Material	Wood	Wood
Description	FOR MULTIMATERIAL 216X30X64T	Expert for Multimaterial Slide Miter # 216X30X24/1.8 64T TCG	<b>New!!</b> Expert for Wood 216 X 1.7 X 1.2 X 30, 24T	Expert for Wood 216 X 1.7 X 1.2 X 30, 48T	Expert for Wood 216 X 1.7 X 1.2 X 30, 66T	7 1/4" x 1" x 60T	7 1/4" 184x2.0/1.4x25.4 T40	7 1/4" 184x2.0/1.4 x25.4 T60	7" 40 TCT Eco for Wood	7" 60 TCT Eco for Wood	Expert for Wood 190 X 2.6 X 1.6 X 20, 24T	Expert for Wood 190 X 2.6 X 1.6 X 20, 48T	Expert for Aluminum 190 X 2.6 X 1.6 X 20, 56T	9 1/4" x 25 x 80T	9 1/4" 235x2.2/1.5x30 T60	9" 60 TCT Eco for Wood
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1



**Circular Saw Blades**

Application / Material	Wood	Wood	Multi Material	Wood	Wood	Wood	Multi Material	Wood	Wood	System AC for CSB	System AC for CSB	Wood	Aluminum	Steel	Stainless	Multi Material	Wood
Description	<b>New!!</b> Expert for Wood Grey 254 x 2.5 / 1.8 X 25.4 40T	<b>New!!</b> Expert for Wood Grey 254 x 2.5 / 1.8 X 25.4 80T	<b>New!!</b> Expert for Multi Mat 254 x 2.5 / 1.8 X 25.4 120T	<b>New!!</b> 250 x 30 x 2.4 / 1.8 80T - TABLE SAW	<b>New!!</b> EXPERT FOR WOOD S 250x30-22T	<b>New!!</b> 254 x 30 x 2.4 / 1.8 60T - MITRE SAW	10" x 30 x 120T	10" 254x2.5/1.8x30 T40	10" 254x2.5/1.8x30 T60	Reduction Ring - 30mm to 25.4mm	Reduction Ring - 30mm to 20mm	10" 80 TCT Eco for Wood	10" 120 TCT Eco for Alu	<b>New!!</b> EXPERT FOR STEEL 305 x 25.4 X 80 TCT	<b>New!!</b> EXPERT FOR STAINLESS 305 X 25.4 X 80 TCT	12" x 1" x 120T	CoolTeq CSB 184x1.6/1.1x 25.4, T16
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1



**Circular Saw Blades**

**Planer Blades & Accessories**

**Jigsaw Blades**

Application / Material	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood	System AC for GHO 10-82 / GHO 6500	Wood	System AC for GHO 12V	System AC for GHO 12V	Wood	Wood	Wood	Wood	Wood	Wood
Description	<b>Q1 2024</b> CoolTeq CSB 235x2.0/1.4x 30, T20	<b>Q1 2024</b> CoolTeq CSB 254x2.2/1.6x30, T24	12" 305x2.5/1.8x30 T100	12" 305x2.5/1.8x30 T40	12" 60 TCT Eco for Wood	HSS, Makita type, Resharpable blades for GHO 20-82	Straight, Reversible Tungsten Carbide Blades	<b>New!!</b> Straight, Reversible Tungsten Carbide Blades + adapter*	Parallel Guide for Planer	Straight, Reversible Tungsten Carbide Blades - GHO 12V	Vacuum Adapter - GHO 12 V	Dustbag - GHO 12 V	T 101BR (reversed, fine straight)	T 101B (fine straight cut)	T 101AO (fine curved)	T 101D (fine straight cut)	T 111C (coarse quick cut)	T 119B (chipboard, perspex)
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	5	5	5	5	5	5






Jigsaw Blades																	
Application / Material	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Wood	Hard Wood	Hard Wood	Polycarbonate	Metal	Metal	Metal	Metal
Description	T 144D (straight quick cut)	T 244D (quick curved cut)	T 119BO (tightest curved cut)	T 344D, (thick wood, soft wood chip-board, fibre board, plywood)	T 144DP (Parallel cut, soft wood & fibre board)	T 234X (Progressor Blade)	T308B (Extra Clean straight cut) - 26086637 51 (Old PN)	T308BO (Extra Clean curve cut) - 260866386 8 (Old PN)	T1044 DP Precision for wood	T144 DF (Bi-Metal, quick clean)	T 101BF (fine straight cut)	T 101A (polycarbonate 10 mm)	T 118G (straight cut, 0.2-1.0 mm)	T 118A (straight cut, 1.5-3.0 mm)	T 118B (straight cut 3-6 mm)	T 127D (straight quick cut)	
Packaging	5	5	5	3	5	5	5	5	3	5	5	5	5	5	5	5	



Jigsaw Blades																	System AC for Jigsaw		
Application / Material	Metal	Metal	Metal	Metal	Metal	Stainless	Stainless	Wood / Metal	Wood	Hard Wood	MULTI MAT	Hard Wood	FIBRE PLASTER	Wood / Metal	Wood / Metal	System AC for Jigsaw	System AC for Jigsaw	System AC for Jigsaw	
Description	T 227D (curved cut)	T 318A (straight cut)	T 318B (straight/curved cut)	T 123X Progressor Blade	T 118BF (thick materials, curved)	T 118 AHM (1.5- 3.0 mm) (Blue - new, Black - old)	T 118 EHM (2.0-5.0 mm) (Blue - new, Black - old)	T 345XF Progressor Blade	T 1044 DP - PRECISION for WOOD	T 144 DHM - EXPERT for HARD-WOOD FAST	T 367 XHM - EXPERT FOR MULTI MATERIAL	T 308 BF - EXPERT for HARD-WOOD 2 SIDE	T 141 HM - EXPERT for FIBER PLASTER	T234X - metal, T345XF - wood & metal, T123X - metal	T130 RIFF, T118 AHM, T141 HM, T101 A, T113 A, T101 BF, T101 BIF, T101 AF, T277 D, T123 X	Screw-driver for Jigsaw	Parallel Guide for Jigsaw	Anti-Splintering Device (5-pcs)	
Packaging	5	5	5	5	5	3	3	3	1	1	1	1	1	3	10	1	1	5	



Foam Blocks										Sanding Rolls		Punch Plate		Hand Sanding Sheet			
Application / Material	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	Wood / Paint	GSS System AC	GSS System AC	Wet & Dry			
Description	Bosch Foam - Profile - 3 pcs pack S470	Bosch Foam - Flat & Edge - 3 pcs pack S471	Bosch Foam - Contour - 3 pcs pack S473	Bosch Foam (flat & edge) - Medium	Bosch Foam (flat & edge) - Fine	Bosch Foam (flat & edge) - Super Fine	Bosch Foam (contour) - Medium	Bosch Foam (contour) - Fine	Bosch Foam (contour) - Super Fine	J450 ROLL 115MMX5.000MM	GRIT 60 GRIT 80 GRIT 100 GRIT 120 GRIT 180 GRIT 240 GRIT 320	Hole punch GSS 230	Hole punch GSS 140	G60 G80 G100 G120	G150 G180 G220 G240 G320 G400	G500 G600 G800 G1000 G1200 G1500	G2000 G2500
Packaging	3	3	3	1	1	1	1	1	1	1pc / 5mts	1	1	100 / ream	100 / ream	100 / ream	100 / ream	



Wood Spade Bits				Countersink Bits		TC Hinge		Impact Screwdriver Bits							
Application / Material	Wood				Wood		Wood		Impact Drills		Cordless Impact Drills				
Description	Selfcut speed, 152mm 18mm 28mm 19mm 30mm 20mm 32mm 22mm 35mm 24mm 36mm 25mm 38mm 26mm 40mm				Quick-change 1/4" hex shank extension 152mm		Brad Point Drill Bit with Counter Sink 3X15 4X15 5X15 6X15 7X20 8X20		TC Hinge Cutting Bit (5 pcs) 15mm, CYL Shank, 1 Pc 20mm, CYL Shank, 1 Pc 26mm, CYL Shank, 1 Pc 35mm, CYL Shank, 1 Pc 40mm, CYL Shank, 1 Pc Spur auger bit, Set 6 pcs, Total Length 450mm, HEX Shank		65 mm, Philips 2, Double ended (1) Impact DEB 65mm, PH2-PH2, 10pcs (2) Impact DEB 110mm, PH2-PH2, 10pcs (3) Impact DEB 150mm, PH2-PH2, 5pcs (4) Impact DEB 65mm, PH2-PH2, 2pcs (5) Impact DEB 110mm, PH2-PH2, 2pcs (6) Impact DEB 150mm, PH2-PH2, 2pcs (7) <b>New!!!</b> 3 pcs Impact Control Power Bit Set Universal Holder 1/4" External hex shank 75mm		10 10 10 5 2 2 2 3 1		
Packaging	1				1		1								







**Pick and Click Drill Bits**

**For Impact Driver**


Application / Material	PICK AND CLICK STORAGE SYSTEM AC									IMPACT DRIVER GDR 120 / GDR 180 / GDx 180 / GDS 250 / GDS 18 V-EC 250 / GDS 18V-Li / Bosch Go 1 & 2						
Description	25mm Bit holder	50mm Bit holder	Empty Case M	Empty Case L	Storage box	25mm extra hard insert bits pack PH,PZ	25mm extra hard insert bits pack SL, Hex	25mm extra hard insert bits pack Torx	25mm extra hard insert bits pack Torx with hole (Security screws)	65mm extra hard power bits pack, PH2 PZ SL6 T15,20,25, H3,4	Nutsetter 6,8,10 and quick change bits holder pack	Extra hard 65mm screwdriver bits and HSS PointTeQ drill bits pack	Extra hard 65mm screwdriver bits and Multi-Construction drill bits pack	44pcs mixed screwdriver bits set	20pcs mixed drill and drive set	Magnetic Sleeve, 1pc
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1



**For Impact Driver**

**GOP Multi-tool Accessories**

Application / Material	IMPACT DRIVER GDR 120 / GDR 180 / GDx 180 / GDS 250 / GDS 18 V-EC 250 / GDS 18V-Li / Bosch Go 1 & 2									Impact Driver						
Description	Impact Power Bit 50mm, 8xPH2	Impact Power Bit 50mm, 8xPZ2	Impact Power Bit 50mm, 4xH5,4xH6	Impact Power Bit 50mm, PH1, PH2, PH3, PZ2, PZ3	Impact Power Bit 50mm, T15, T20, T25, T30, T40	Impact Power Bit 50mm, PH2, PH2, PZ2, PZ2, T20, T25, T30, T30, Bitholder Standard	Impact DEB 65mm, PH1-PH2, PH2-PH3, PH2-PZ2, PH2-PZ2, SL1x5.5, T15-T20, T15-T20, T25-T30	Impact DEB 110mm, PH2, PH2, PZ2, PZ2, T15, T20, T25, T30	Screw-driver Bit Set 45pcs + Handle	AVI 93 G SANDING PLATE	RIFF SEGMENT SAW-BLADE AVZ 70RT (70MM)	RED WOOD TOP SANDING SHEET (10 PCS)	Star lock - AIZ 32 EPC (HCS)	AIZ 32 BSPC HCS Hardwood C-Tec 1Pack	AIZ 32AB	BIM SERRATED SEGMENT BLADE ACZ 100
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1



**GOP Multi-tool Accessories**

**Sabre Saw Blades**

Application / Material	Multi-Material	Wood/ Metal	Tile	Wood	Multi-Material	Wood/ Nails	Wood/ Nails	Wood	Metal	Metal	Metal	Metal	Wood/ Metal	Wood/ Metal	Heavy Metal	Heavy Metal
Description	ACZ 85 EIB BIM, PLASTER-BOARD (1 PC)	STAR LOCK AIZ 32 APB (BIM), 32x50MM	BASIC TILE SET (3 PCS)	BASIC WOOD SET (3 PCS)	OMT 13PCS SET ALL IN ONE	S722VFR Pallet Repair (190mm)	S1122VFR Pallet Repair (225mm)	S1111K Coarse wood (225mm)	S1122EF Thin sheet metals (225mm)	S1122BF Thick sheet metals (225mm)	S1122BF Thick sheet metals (225mm)	S922BF Thick sheet Metals (150 mm)	S1156XHM Progressor for Wood + Metal	S3456XF BIM Progressor for Wood + Metal	S1155 CHM Endurance for Heavy Metal	S 955 CHC Expert for Thick Tough Metal - 2608653180
Packaging	1	1	1	1	1	5	5	2	5	5	100	25	1	5	1	1





	Sabre Saw Blades				Impact Drill/ Cordless Drill/ Rotary Drill Accessories											
Application / Material	Heavy Metal	Wood/ Metal	Aerated Concrete	Aerated Concrete	IMPACT DRILL / CORDLESS DRILL / ROTARY DRILL SYSTEM AC											Philips Screw Driving
Description	S1125 VF Heavy for Metal	S1411 DF Heavy for Wood + Metal	S 1241 HM Endurance for Aerated Concrete	S 2041 HM Endurance for Aerated Concrete	Paint stirrer attachment	KEYLESS CHUCK 1-6MM, WITH 1/4" HEX CHUCK	3/8"-24 mount, 1,0-10 mm capacity	1/2"-20 mount, 1,5-13 mm capacity	1/2"-20 mount, 1,5-13 mm capacity	1/2"-20 mount, 1,5-13 mm capacity	1/2"-20 mount, 1,5-13 mm	For chucks up to 6,5 mm	For chucks up to 13 mm	For chucks up to 16 mm	S'RIVER BIT (PH1 89 MM) (3 PIECES)	S'RIVER BIT (PH2 89 MM) (3 PIECES)
Packaging	5	5	2	2	1	1	1	1	1	1	1	1	1	1	1	1



	Screwdriver Bits							Vacuum Accessories / Dust-Free System									
Application / Material	Heavy Metal	Philips Screw Driving	Torq Screw Driving	Slotted Screw Driving			VACUUM GAS 15 / GAS 12-25 PS					VACUUM - GAS 18V	VACUUM GAS 11-21 / GAS 50				
Description	S 1155 CHC Expert for Thick Tough-Metal - 2608657 395	S'RIVER BIT (PH3 89 MM) (3 PIECES)	SCREW DRIVER BITS T8, T10, T15 (89MM)	SCREW-DRIVER BITS T20, T25, T30 (89MM)	SCREW-DRIVER BITS, S 0.8 X 4.5	SCREW-DRIVER BITS, S 0.8 X 5.5	SCREW-DRIVER BITS, S 1.0 X 5.5	Elbow	Crevice nozzle	Filter	Tool sleeve	Multi-Purpose Nozzle	Extraction tube / pipe	Hose - Gas 18V	Paper Dust Bag (5 pcs / pack) for GAS 11-21	Permanent Filter for GAS/PAS 11-21	
Packaging	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	



	GBG 35-15		GBG 60-20			
Application / Material	VACUUM GAS 11-21 / GAS 50	VACUUM GAS 11-21 / GAS 50	Metal Grinding			
Description	Small round brush	3m vacuum cleaner hose, 35 mm for PAS11-21/ GAS 11-21	Grinding Wheel - 150mm X 20.0mm X 20.0mm Grit 24	Grinding Wheel - 150mm X 20.0mm X 20.0mm Grit 60	Grinding Wheel - 200mm X 25.0mm X 32.0mm Grit 36	Grinding Wheel - 200mm X 25.0mm X 32.0mm Grit 60
Packaging	1	1	1	1	1	1



The best your tool can get. Bosch Professional Accessories.




# Home and Garden



Home

made by

you.



**6 MONTHS  
WARRANTY**



# HOME AND GARDEN

## High Pressure Washers

### EasyAquatank 100 360° Gun



Motor Power (W)	1,100
Max. Pressure (bar)	100
Max. Flow Rate (l/h)	270
Max. Flow Temp (°C)	40
Hose (m)	3 PVC
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	3

Scope of Supply:  
Bosch 360° high pressure gun (with nozzle: 20/80° variable fan), 3 m high pressure hose, High pressure detergent nozzle (450 ml), Water filter (black)

### EasyAquatank 100 Long Lance



Motor Power (W)	1,100
Max. Pressure (bar)	100
Max. Flow Rate (l/h)	270
Max. Flow Temp (°C)	40
Hose (m)	3 PVC
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	3

Scope of Supply:  
Bosch high pressure gun, Lance, 3 m high pressure hose, Variable fan jet nozzle, Water filter (black)

### EasyAquatank 110 Long Lance



Motor Power (W)	1,300
Max. Pressure (bar)	110
Max. Flow Rate (l/h)	330
Max. Flow Temp (°C)	40
Hose (m)	3 PVC
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	3

Scope of Supply:  
Bosch high pressure gun, Lance, 3 m high pressure hose, Variable fan jet nozzle, Rotary nozzle, High pressure detergent nozzle (450 ml), Water filter (black)

### EasyAquatank 120 Long Lance



Motor Power (W)	1,500
Max. Pressure (bar)	120
Max. Flow Rate (l/h)	350
Max. Flow Temp (°C)	40
Hose (m)	5 PVC
Self-priming Cable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	5

Scope of Supply:  
Bosch high pressure gun, Lance, 5 m high pressure hose, Variable fan jet nozzle, Rotary nozzle, High pressure detergent nozzle (450 ml), Water filter (black)

## High Pressure Washers

### UniversalAquatank 125



Motor Power (W)	1500
Max. Pressure (bar)	125
Max. Flow rate (L/h)	360
Max. Flow temp (°C)	40
Hose (m)	5 PVC
Self-priming Capable	Yes
Voltage (V)	230 / 240
Frequency (Hz)	50 / 60
Cable length (m)	5

Scope of Supply:  
Bosch high pressure gun, Lance, 5m high pressure hose, 3-in-1 nozzle, High pressure foam nozzle, 450 ml Water filter (clear)

### UniversalAquatank 130



Motor Power (W)	1700
Max. Pressure (bar)	130
Max. Flow rate (l/h)	420
Max. Flow temp (°C)	40
Hose (m)	6 PVC
Self-priming Capable	Yes
Voltage (V)	230 / 240
Frequency (Hz)	50 / 60
Cable length (m)	6

Scope of Supply:  
Bosch high pressure gun, Lance, 6m high pressure hose, 3-in-1 nozzle, High pressure foam nozzle, 450 ml Water filter (clear)

### AdvancedAquatank 140



Motor Power (W)	2,100
Max. Pressure (bar)	140
Max. Flow Rate (l/h)	450
Max. Flow Temp (°C)	40
Hose (m)	8 PU
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	8

High Pressure Hose Reel Yes  
Motor Type Induction  
Scope of Supply:  
Bosch high pressure gun, Lance, 8m high pressure hose, Variable fan jet nozzle, Rotary nozzle, High pressure foam nozzle (550 ml), Water filter (clear)

## HPW Accessories

### 360 Degree Gun



360° Pistol for EasyAquatank 100  
Full rotation and variable nozzle  
450 ml capacity detergent accessory  
Simple push-fit connections



## HPW Accessories

### Nozzle 3-in-1



Adjustable nozzle  
High pressure fan blasts away dirt  
Rotary jet removes stubborn dirt  
Low pressure for soap option

### Rotary Nozzle



Powerful oscillating head  
Removes tough dirt  
Rotary jet for powerful cleaning

### 90 Degree Nozzle



90° nozzle  
For cleaning under car wheel arches  
Remove dirt build up in gutters

### Vario Fan Jet Nozzle



Adjustable nozzle  
Fan jet for rinsing and general cleaning  
Pencil jet for concentrated power to remove stubborn dirt

## HPW Accessories

### Trio Nozzle



Adjustable nozzle  
High pressure fan blasts away dirt  
Rotary jet removes stubborn dirt  
Pencil jet for concentrated power to remove stubborn dirt

### Suction Nozzle



Perfect for emptying rain water, removing flood water or cleaning up after washing the car or patio  
Minimum suction flow 50 ltr/min

### 450 ml Foam Nozzle



Applies detergent quickly and evenly  
Connects easily to the lance  
450 ml capacity detergent bottle

### Water Filter



Fits directly on water inlet  
Easy to remove and clean

## HPW Accessories

### High Pressure Hose 6 m



Resists twisting in use  
Quick connect SDS fittings  
9.5 mm hose diameter, 6 m length  
Material : PVC (Polyvinyl Chloride)  
For use with a pressure of up to 135 bar

### Extension Hose 6 m



Additional 6 m in hose length  
Resists twisting in use  
Quick connect SDS fittings

### Drain Cleaner 10 m



Jets propels the nozzle forward  
10 m length

### High Pressure Self Priming Kit



Enables you to draw clean water from water source other than a tap  
Reinforced for added durability

## HPW Accessories

### Compact Brush



Fan jet nozzle with lance extension  
Brush skirt to reduce splashback  
Easy push-fit connections  
L 152 X W 96 X H 104 mm

### Car Cleaning Kit



Set includes:  
90 Degree Nozzle for hard to reach areas  
Low-pressure brush can be used with detergent  
Extension hose and microfibre cloth

### Home & Car Kit



Set includes:  
90 Degree Nozzle for hard to reach areas  
Low-pressure brush can be used with detergent  
AquaSurf 250 Patio Cleaner

### 360 Cleaning Kit



Set includes:  
360° Pistol for full rotation of nozzle  
Extension hose and microfibre cloth

## Cordless Cleaning Brush

### Universal Brush



3.6 V/1.5 Ah integrated Li-ion Battery  
Run time (mins) 45  
No-load speed (rpm) 215  
IP protection type: IPX5  
Easy-to-click accessory system  
Scope of Supply:  
Bristle brush, Detailed brush, Pad holder, Microfibre non-scratch pad, Abrasive heavy-duty pad, Micro USB cable

### Bristle Brush



For heavy duty cleaning on a wide range of surfaces around the home.  
1 piece included in carton packaging

### Detailed Brush



Ideal for scrubbing in hard to reach areas, for example when cleaning taps and plugholes.  
1 piece included in carton packaging

### Pad Holder



Holder to mount cleaning pads on to the machine.  
1 piece included in carton packaging

## Cordless Cleaning Brush

### Microfibre non-scratch pad



Designed for use on surfaces that you don't want to be marred by abrasives.  
3 pieces included in carton packaging

### Abrasive heavy duty pad



Suitable for the toughest cleaning applications and for removing rust.  
3 pieces included in carton packaging

### Kitchen scour pad



Embedded abrasives help to break up tougher dirt and grime.  
3 pieces included in carton packaging

### Melamine Eraser pad



Easy wet and dry cleaning on smooth surfaces and glass.  
3 pieces included in carton packaging



## Cordless Air Pump

### EasyPump

NEW



3.6 V/3.0 Ah integrated Li-ion battery	
Max. pressure (bar)	10.30
Max. pressure (psi)	150
Max. pressure (kpa)	1,030
Max. output volume (l/min)	10
Hose length (m)	0.2
Scope of Supply:	
Valve adapters: Ball needle, French valve, Balloon adapter, Micro USB cable, Textile bag	

## Cordless Pruner

### EasyPrune

NEW



3.6 V/1.5 Ah integrated Li-ion battery	
Max. cut diameter (mm)	25
Max. cut performance: Up to	
450 cuts per charge	
POWER ASSIST SYSTEM	
Scope of Supply:	
Micro USB cable	

### EasyPrune Blade

NEW



Replacement blades -stainless steel, bypass blades

## Cordless Shear

### EasyShear

NEW



3.6 V/1.5 Ah integrated Li-ion battery	
No-load runtime (mins)	Up to 40
Max. area cut performance:	
22sqm per charge	
Scope of Supply:	
Grass shear blade (mm)	80
Shrub shear blade(mm)	120
Micro USB cable	

## Cordless Shrub and Grass Shear Accessories

### 80mm Grass Shear Blade

NEW



Replacement blades 80mm - Swiss-made, laser cut diamond ground blades

### 120mm Shrub Shear Blade

NEW



Replacement blades 120mm - Swiss-made, laser cut diamond ground blades

## Hand Mower

### AHM 38G

NEW



5 blade cylinder cutting system  
Hardened steel blades  
Height-of-cut (mm) 15-43  
Width-of-cut(cm) 38  
Tool-free setting of blade  
Hand push  
Scope of Supply:  
Grass collection box

## Lawn Mower

### ARM 32 (ROTAK)

NEW



Motor Power (w) 1200  
Torque (nm) 13  
Width of Cut (cm) 32  
Height of Cut (mm) 20-60  
Rotary Blade Cutting System  
Grass Box Capacity (L) 31  
Corded Electric  
Scope of Supply:  
Grass Box

## Lawn Mower Blade

### ARM 32 Sharpened Blade

NEW



Replacement Blades (cm) 32

## Leaf Blower/ Vacuum

### UniversalGardenTidy 3000

NEW



Motor Power (w) 1600 - 3000  
Blower Airflow (km/h) 165-285  
Vacuum Flow rate max (l/s) 160  
Shredding Ratio 12:1  
Collection Bag (L) 50  
Weight (Blow / Vac): 3.4 / 4.7kg  
Scope of Supply:  
Blow nozzle and vacuum tube,  
Shoulder support strap,  
Large collection bag

## Hedge Trimmer

### UniversalHedgeCut 50

NEW



Motor Power (w) 480  
No load stroke rate (spm) 3,400  
Blade length (cm) 50  
Tooth opening(mm) 26  
Sound power level (dB(A)) 91  
Weight (kg) 3.5  
Scope of Supply:  
Diamond ground blade, 50cm  
Knife cover

## Grass Trimmer

### EasyGrassCut 26

NEW



Motor Power (w) 280  
Cutting diameter (cm) 26  
Cutting Speed (rpm) 12,500  
Spool 1.6mmx4m  
Weight (kg) 2.0  
Corded Electric

## Grass Trimmer Spool

### Cutting Line Spool

NEW



Replacement spool 1.6mmx4m

## Glue Gun

### PKP 18 E

NEW



Power (w) 200  
Gluing capacity (g/min) 20  
Glue stick diameter (mm) 11  
Glue stick length (mm) 45-300  
Max. preheat time (min) 7  
Melting temperature (°C) 200  
Scope of Supply:  
1 x glue stick, Extra-long nozzle

### Glue Pen

NEW



3.6 V/1.5 Ah integrated Li-ion battery  
Gluing capacity (g/min) 2  
Glue stick diameter (mm) 7  
Glue stick length(mm) 150  
Max. preheat time (sec) 15  
Melting temperature (°C) 170  
Max. working time: 30min / 6 sticks  
Scope of Supply:  
4 x glue sticks, Micro USB charger

### PKP 3.6 LI

NEW



3.6 V/1.5 Ah integrated Li-ion battery  
Gluing capacity (g/min) 2  
Glue stick diameter (mm) 7  
Glue stick length(mm) 150  
Max. preheat time (sec) 15  
Melting temperature (°C) 170  
Max. working time: 30min / 6 sticks  
Scope of Supply:  
4 x glue sticks, Micro USB charger



# IXO COLLECTIONS



## IXO 7 with SPICE mill

NEW



3.6 V/2.0 Ah integrated Li-ion battery	
No-load speed (rpm)	235
Max. torque for soft/hard (Nm)	3 / 5.5
Charging time (h)	3
Screw Diameter (mm)	5
Scope of supply:	
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box	

## IXO 7 with BBQ blower

NEW



3.6 V/2.0 Ah integrated Li-ion battery	
No-load speed (rpm)	235
Max. torque for soft/hard (Nm)	3 / 5.5
Charging time (h)	3
Screw Diameter (mm)	5
Scope of supply:	
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box	

## IXO 7 with VINO corkscrew

NEW



3.6 V/2.0 Ah integrated Li-ion battery	
No-load speed (rpm)	235
Max. torque for soft/hard (Nm)	3 / 5.5
Charging time (h)	3
Screw Diameter (mm)	5
Scope of supply:	
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box	



**Bright Light**  
360° Light Ring

**Best Ergonomics**  
Ergonomic Design

**IXO Collection**

**20% More Power**  
+ 20% More Power

**Runtime up to 190 screws**  
190 x Max.

**Neat Storage + Accessories**  
100% RECYCLED Storage Box

**HOME**

**IXO Collection**

**DIY & HANDICRAFT**

Home attachment - Available ; DIY & Handicraft - coming soon

## HEADLAMP

### HEAD LAMP



01 2024

3x AAA, 1.5 Ah batteries – not included	
Brightness (lm)	190
Lighting levels:	H-190lm, L-55lm, Strobe
Lighting time	H-3.5h; L-15h; S-8h
Illumination distance (m)	Wide/H-28, L-14
LED type	White COB LED
Watertightness	IPX4 (splashproof)
Angle adjustment	60°
Lamp dimensions (mm)	L62*W46*H42
Band Dimensions	
Lamp Weight (kg)	0.058



**6 MONTHS WARRANTY**



# BOSCH AUTHORIZED SERVICE CENTERS

**D.L. ELECTRONICS SERVICE CENTER**  
 #65 Decidar Bldg. Lower Bonifacio Street, Baguio, Benguet 2600  
 T: +63 74 661 9438  
 E: boschbaguiohub@gmail.com

**D.L. ELECTRONICS SERVICE CENTER**  
 Coastway Complex, Arellano Bani Dagupan City 2400  
 M: +63 945 730 4673  
 E: dlbaguio@yahoo.com

**DAU-AGRI IND'L CORP.**  
 Dau Access Road Nlex, Highway, Dau Mabalacat City, Pampanga 2010  
 T: +63 45 458 2941  
 E: dauagri@gmail.com

**MALIBANGA ENTERPRISES**  
 346-C Alabang Zapote Road, Talon Uno Las Pinas City 1700  
 T: +63 2 8833 6214  
 E: malibanga\_ent@yahoo.com

**TOOL CARE MASTER PHILS. INC.**  
 G/F WC Bldg., 2438 Belarmino St. Brgy Bangkal, Makati City 1233  
 T: +63 2 7738 7406 / 8401 1934  
 M: +63 917 103 2451  
 E: toolcaremaster@gmail.com

**TOOL CLINIC CORPORATION**  
 20-A D. Tuazon corner Luskot Street Don Manuel, Quezon City 1113  
 T: +63 2 7255-3932  
 M: +63 927 078 4408 / 917 173 6636  
 E: toolcliniccorp@gmail.com

**ALTSTAR ENTERPRISES**  
 1054 Reina Regente cor. Recto Avenue, Binondo, Metro Manila 1006  
 M: +63 917 830 5576  
 E: howelltansy@gmail.com

**FAR EASTERN HARDWARE & FURNITURE**  
 38 Quezon St., Iloilo City 5000  
 T: +63 33 337 3808  
 E: feh\_qzn@yahoo.com / sales@fareastern.com.ph

**NIPPON ENGINEERING WORKS**  
 Ledesma corner Mabini Street, Iloilo City 5000  
 T: +63 33 337 3232 / 508 1869 / 337 1122  
 E: nipponengineeringworks@gmail.com

**BACOLOD INTEGRAL INC.**  
 JL Bldg Luzuriaga St. Brgy 31, Bacolod City, 6100  
 T: +63 34 433 8170 / 476 6561 / 434 2303  
 E: bacolodintegral@yahoo.com

**REJOICE HARDWARE & ELEC'L SUPPLY**  
 166 Hermie Bldg Cervantes St. Dumaguete City 6200  
 T: +63 35 422 6762 / 225 4685 / 225 1836  
 E: rejoice\_hardware@yahoo.com

**N&N SERVICE CENTER**  
 Sunriser Lane 1 Talon Talon Loop Tugbungan, Pagadian City, 7016  
 M: +63 62 993 2190 / 991 6578 / 926 1665  
 E: nnservicecenter.c@gmail.com

**HI-12 APPLIANCE MARKETING & SERVICE**  
 Mariano Badelles, Sr. Street, Brgy Saray, Iligan city, 9200  
 T: +63 63 221 5639 / 223 8536  
 E: hitwelve2017@yahoo.com

**GOMEZ POWER TOOLS SALES & SERVICE CTR.**  
 Rizal, Santiago City, Isabela, Region 2, Cagayan Valley 3311  
 T: +63 78 839 55266  
 E: gomezpowertools@yahoo.com

**CONSUMERS APPLIANCE SERVICE CENTER**  
 National Highway, Purok 2, Bonfal Proper Bayombong, Nueva Vizcaya 3700  
 T: +63 78 805 1880 M: +63 917 564 4800  
 E: conserv\_2006@yahoo.com

**JDL AIRCONDITIONING & REF. SPECIALIST CORP.**  
 Brgy. Zulueta, Maharlika Highway Cabanatuan City, Nueva Ecija 3100  
 T: +63 44 806 1841  
 E: jdl.aircondition@gmail.com

**CHARLESTON COMPUTER EXPRESS CENTER**  
 476 Rizal Avenue corner P. Genato Street, Brgy 21, Batangas City 4200  
 T: +63 43 980 2169  
 E: charlestonpcworx@gmail.com

**OLIVAN HARDWARE DEPOT INC.**  
 Behind Olivian Sea Oil Station, Magsaysay Avenue, Naga City 4400  
 T: +63 54 472 2828  
 E: olivanhomedepotsales@gmail.com

**DARAGA DY ENTERPRISES INC.**  
 Rizal Street, Daraga Albay 4501  
 T: +63 52 483 3613 / 483 3813  
 E: jen\_sy\_dy@yahoo.com

**WASHINGTON ENTERPRISES**  
 181-185 Rizal Ave., Tacloban City 6500  
 T: +63 53 321 2521  
 E: wephl@yahoo.com; washington.enterprises.service@gmail.com

**TOOLAID SERVICE CENTER**  
 Unit D, Arcenas Bldg., MJ Cuenco Ave. Brgy. T. Padilla, Cebu City 6000  
 T: +63 32 427 3375  
 M: +63 942 812 1885 / 969 316 3888  
 E: support-cbu@toolaid.ph

**TOOLAID SERVICE CENTER**  
 Unit 2 & 3 Maroo Arcade Mantawi Drive, William Seno Street Mandaue City 6014  
 T: +63 32 414 7909  
 M: +63 942 833 6437 / 969 315 3888  
 E: support-mde@toolaid.ph

**DMD ELECTRONICS**  
 JVS Peak Bldg., Door 2 & 3 Roxas Blvd., Davao City 8000  
 T: +63 82 284 3114  
 E: dmd\_electronics@yahoo.com

**AC POWERTOOLS TRADING**  
 #583 Jr Borja Extension Camaman-an, Cagayan de Oro City 9000  
 M: +63 966 419 6636  
 E: acpowertools2023@gmail.com

**ROBERT BOSCH INC.**, 11/F West Campus, 20 Le Grand Ave., McKinley West, Fort Bonifacio, 1634 Taguig City  
 T: +63 2 8870 3888 | www.bosch-pt.com.ph  
**BOSCH CEBU HUB**, Unit 2 & 3 Maroo Arcade, Mantawi Drive, William Seno St., Cebu City 6014  
 T: +63 32 414 7909 | E: toolaidservicecentermde@yahoo.com  
**BOSCH DAVAO HUB**, Door 2 & 3 JV'S Peak Bldg., Roxas Blvd., Davao City 8000  
 T: +63 82 284 3114 | E: dmd\_electronics@yahoo.com

